

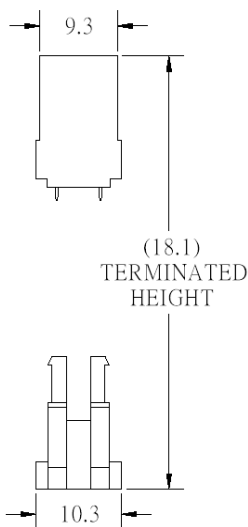


SPECIFICATIONS

Current rating: 1 amp
 Contact material: Phosphor bronze
 Contact plating: Tin, selective gold, gold flash, gold plate
 Insulator material: PBT, glass reinforced, UL94V-0
 Withstanding: 500VAC for 1 min.
 Contact resistance: 30 milliohms max.
 Insulation resistance: 3,000 megohms min.
 Operating temperature: -40°C to +105°C
 Terminates with: 1.27mm pitch flat ribbon cable

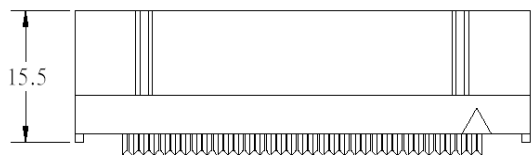

Available Only On
Central Components
Cables

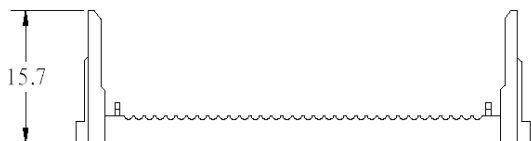

Dimensions		
Pos.	A	B
20	36.82	22.86
34	54.60	40.64

Series	No. of Contacts	Contact Plating	Options
AFCA-CER	XX	XX	XX
IDC socket, edge card reinforced type	20, 34	TN=Tin GD=Gold flash SG=Selective gold	GDXX=Gold XX=5μ", 10μ", 15μ", 30μ" gold P=Polarity NP=No polarity

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	P/N table fixed	10/15/07	Tom	Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **AFCA-CER-XX-XX-XX**

Description: Card edge IDC socket, 2.54mm pitch, reinforced type