
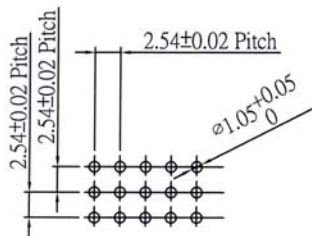


A=2.54 * (No of Spaces-1)
B=A+2.54±0.35




P.C.Board Layout

See catalogue for customer specified lengths.

SPECIFICATIONS

- Current rating: 5 amps
- Operating voltage: 250VAC
- Contact material: Phosphor bronze
- Contact plating: Tin, gold or duplex over nickel
- Contact resistance: 10 milliohms max.
- Insulator material: PBT, glass reinforced, UL94V-0
- Insulator resistance: 5,000 megohms min.
- Withstanding: 1,000 VAC for 1 min.
- Operating temperature: -55°C to 125°C

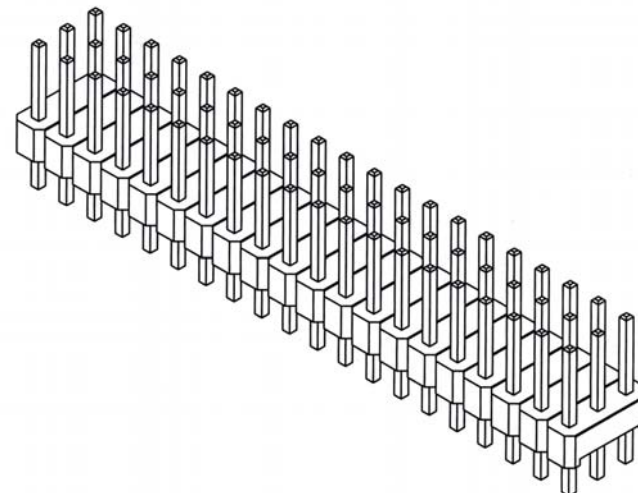

Series	Rows	Total Contacts	Type	Contact length	Plating
APH	X	XX	XX	XXX	XX
Pin header, .100" pitch	1=Single 2=Double 3=Triple	Single row 1-40 Dual row 2-80 Triple row 3-120	[blank]=Straight RA=Right angle SM=Surface mount	SDA=.240"mating, .120"tail SDB=.318"mating, .120"tail CSL=Customer specified length	GDXX=Gold SGXX=Duplex TN=Tin XX=Flash if blank; 15, 30, or 50µ"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **APH-3-XX-SDA-XX**

Description: 2.54 Pitch Pin Header Triple Row Straight