



Dimensions	
C	0.079" X No. of positions
D	0.079" X No. of spaces

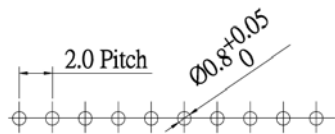

P.C.Board Layout

SPECIFICATIONS::

Current Rating:	3 amps
Operating Voltage:	250VAC
Contact Material:	Phosphor Bronze
Contact Plating:	Tin, gold or duplex
Contact Resistance:	10 milliohms max.
Insulator Material:	PBT, glass reinforced, UL94V-0
Insulator Resistance:	1,000 megohms min.

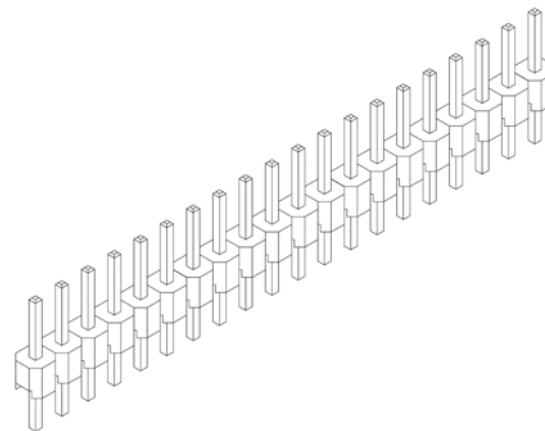

Series	Insulator	Rows	Type	Contacts	Contact Length	Plating
BPH	X	X	XX	XX	XX	XX
2mm unshrouded pin headed	[blank]=2mm C=1.5mm D=1.0mm	1-2	[blank]=Straight RA=Right Angle SM=Surface Mount	Single Row=1-40 Double Row=2-80	SD=Standard CSL(A/E) for custom length	GDXX=Gold SGXX=Duplex TN=Tin XX=Flash if blank, 15,30, 50u"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/23/10
				Checked	Lizzy	04/23/10
				Drawn	Tina	04/23/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BPH-1-X-XX-XX-XX-XX**

Description: 2.0mm Pitch Single Row Pin Header