


**PIN ASSIGNMENT:**

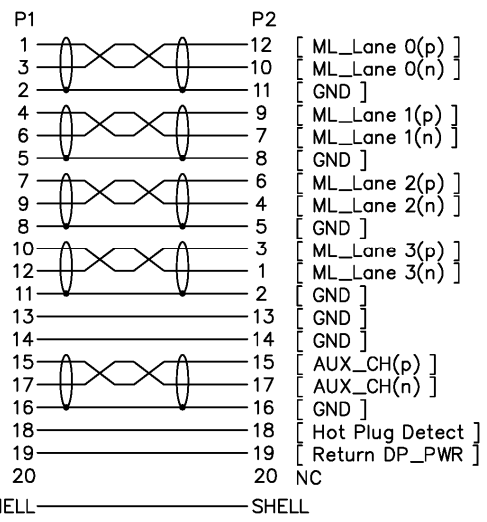

**SPECIFICATIONS**

100% open & short test  
 Withstanding Voltage: DC 300V 0.01Sec.  
 Insulation Resistance: 10M Ohm (Min)  
 Conductive Resistance: 2 Ohm (Max)

Item	Name	Material
1	Cable	UL20276 (28AWG*1PR+Drain Wire+AL/Mylar)*5+28AWG*4C+AL/Mylar+Braid OD:7.3 PVC Jacket Black Impedance:100 Ohm
2	Connector	Displayport Plug Contact: Plate Gold Shell:Plate NI w/Latch w/Cover Black
3	Innermold	PE Low Density
4	Shield	Copper Foil 18u"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	05/12/08
				Checked	Lizzy	05/12/08
				Drawn	Tina	05/12/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **DPC-94202**

Description: Display Port Cable with Plastic Hood & Latch