
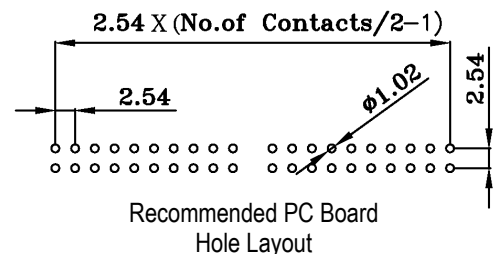


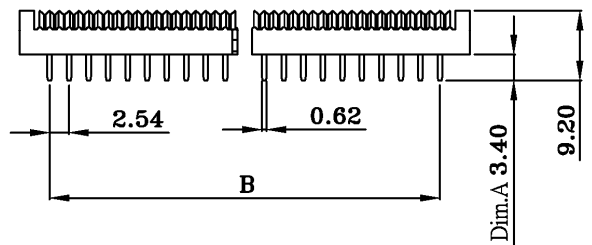
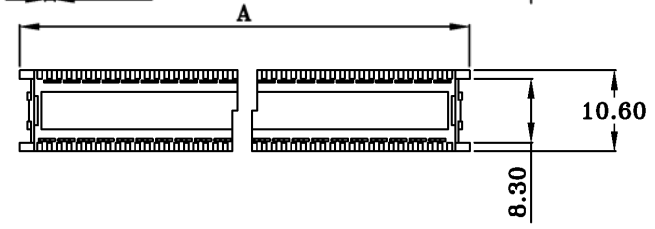

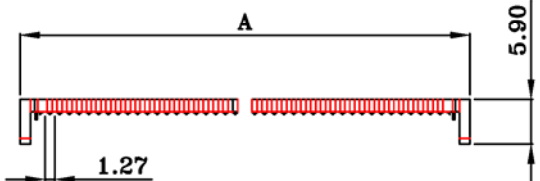


SPECIFICATIONS

Current rating: 1 amp
 Contact material: Phosphor bronze (std) or brass
 Contact plating: Tin, gold or selective gold
 Insulator material: PBT +30% glass fiber, UL94V-0, black (std)
 Insulation resistance: 1,000 megohms min.
 Operating temperature: -45°C to +85°C

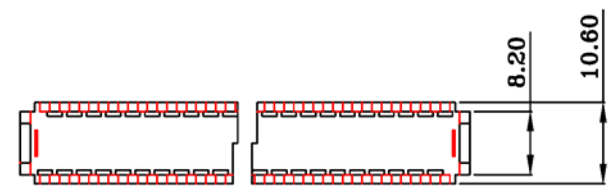

Dimensions		
Pos.	A	B
8	15.45	07.62
10	17.95	10.16
14	23.05	15.24
16	25.50	17.78
18	28.12	20.32
20	30.68	22.86
24	35.80	27.94
28	40.81	33.02
40	56.15	48.26

Series	Contacts	Plating	Options
FCD	XX	XX	XX
Ribbon cable DIP plug, .100"x.300" (See also FCD-B, .100"x.600")	08,10, 14, 16, 18, 20, 24, 28, 40	TN=Tin SGXX=Selective gold GDXX=Gold XX=Flash if blank; 3, 5, 15, 30µ" gold	[blank]=None RD=Red GY=Gray B=Brass pin BL=Blue WT=White YE=Yellow GN=Green OR=Orange

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/09/07
				Checked	Lizzy	04/09/07
				Drawn	Tina	04/09/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **FCD-XX-XX-XX**

Description: Ribbon cable DIP plug, .100" x .300"