


SPECIFICATIONS

Current Rating: 0.5 Amp
 Contact Resistance: 30m Ohm Max.
 Insulator Resistance: 1000M ohm min.
 Insulator: PBT & Glass Fiber UL94V-0, Black
 Contact: Phosphor Bronze or Brass
 Withstanding: 250V AC/1 minute
 Operating Temp: -40 ~ +105C

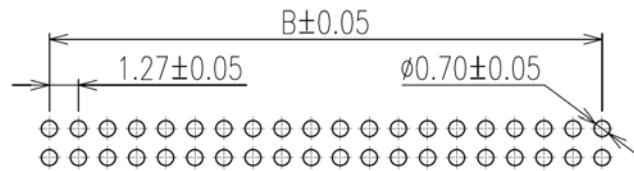

P.C.B. Layout

No.	A	B	No.	A	B	No.	A	B
06	8.01	2.54	20	16.90	11.43	44	32.14	26.67
08	9.28	3.81	22	18.17	12.70	50	35.95	30.48
10	10.55	5.08	26	20.71	15.24	60	42.30	36.83
12	11.82	6.35	30	23.25	17.78	68	47.38	41.91
14	13.09	7.62	34	25.79	20.32	80	55.00	49.53
16	14.36	8.89	40	29.60	24.13			

Series	Contacts	Contact Plating
FCP-B	XX	XX
1.27mm Pitch Transition Plug	See chart	TN=Tin plate GD=Gold Flash

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **FCP-B-XX-XX**

Description: 1271 DIP Plug 1.27mm Pitch IDC Type