


Recommended P.C. Board Hole Layout

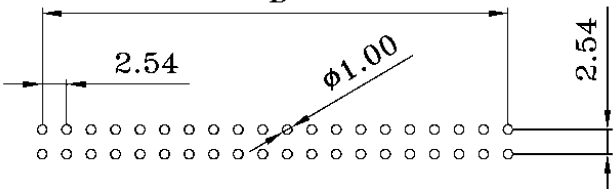

**SPECIFICATIONS**

Current rating: 1 amp  
 Contact material: Brass  
 Insulator material: PBT with 30% glass fiber, UL94V-0  
 Insulator resistance: 1,000 megohms min.  
 Withstanding: 500VAC for 1 min.  
 Operating temperature: -55°C to +105°C

Dimensions		
Item	A	B
6	12.94	5.08
8	15.48	7.62
10	18.10	10.16
12	20.51	12.70
14	23.05	15.24
16	25.64	17.76
18	28.15	20.32
20	30.78	22.86
24	25.86	27.94
26	38.40	30.48
28	40.60	33.02
30	43.50	35.56
34	48.58	40.64
40	26.20	48.26
50	69.00	60.96
60	81.75	73.66
64	86.83	78.74

Series	Positions	Plating	Color
FCP	XX	XX	XX
Flat cable transition plug	6-64 positions	SG=Selective gold TN=Tin	[blank]=Black GY=Gray

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	UL	11/09/05	Tom	Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **FCP-XX-XX-XX**

Description: Flat cable transition plug