


SPECIFICATIONS

Current rating: 3A AC, DC
 Contact material: Phosphor bronze or brass
 Contact resistance: 20 milliohms max.
 Insulation material: PBT, glass reinforced, UL94V-0 rated, Black
 Insulation resistance: 1000 megohms min.
 Withstanding: 500VAC for 1 min.
 Operating temperature: -40°C to 105°C

Terminated with 1.27mm pitch flat ribbon cable

Pos.	A	B
10	11.43	18.17
16	19.05	25.79
20	24.13	30.87
26	31.75	38.49
34	41.91	48.65
40	49.53	56.27
50	62.23	68.97
60	74.93	81.67

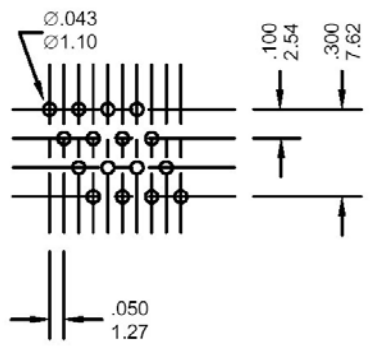

Series	Contacts	Plating	Options
FCP	XXA	XX	XX
IDC transition plug	10, 14, 16, 20, 26, 34, 40, 50, 60, 64	[blank]=Flash TN=Tin SG=Selective gold GDXX=Gold flash	[blank]=None 4R=4 rows


RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	PNT	01/08/10	Greg	Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **FCP-XXA-XX-4R**

Description: IDC transition plug, 4 rows

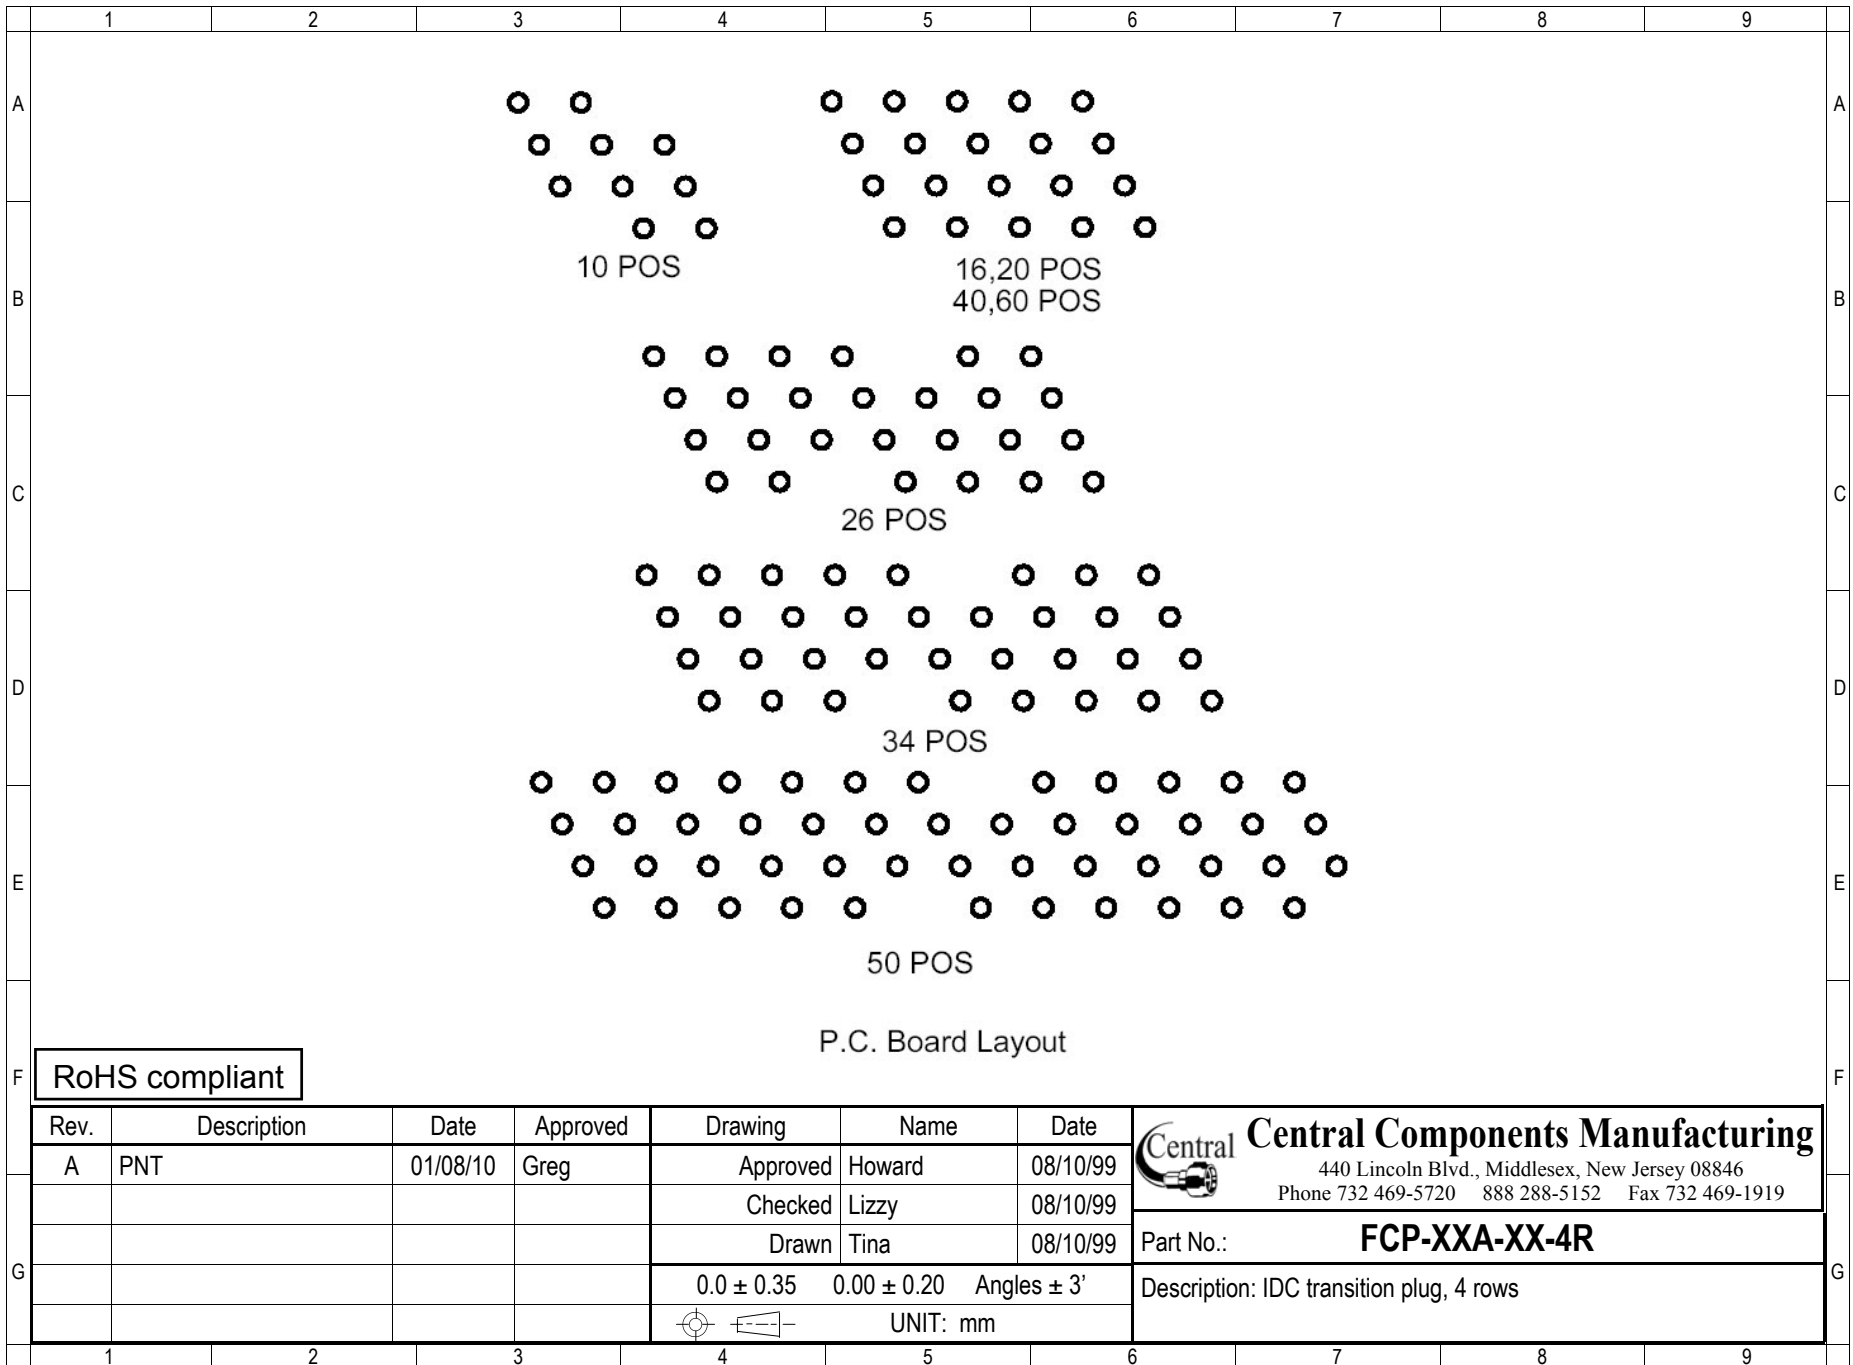

10 POS

16,20 POS
40,60 POS

26 POS

34 POS

50 POS

P.C. Board Layout

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	PNT	01/08/10	Greg	Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **FCP-XXA-XX-4R**

Description: IDC transition plug, 4 rows