




**SPECIFICATIONS**



Current rating: 1 amp  
 Contact material: Phosphor bronze  
 Contact plating: Tin, selective gold, gold flash, gold plate  
 Insulator material: PBT, glass reinforced, UL94V-0  
 Withstanding: 250VAC for 1 min.  
 Contact resistance: 30 milliohms max.  
 Insulation resistance: 1,000 megohms min.  
 Operating temperature: -40°C to +105°C  
 Terminates with: 0.635mm pitch flat ribbon cable

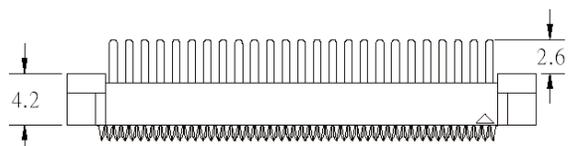

(6.9)  
TERMINATED  
HEIGHT

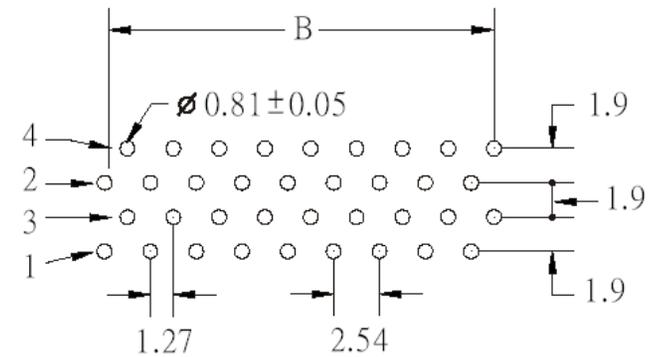

Recommended PC Board Layout



Series	No. of Contacts	Contact Plating
FDPA-HD	XX	XX
1.27mm pitch DIP plug, high density	30, 40, 50, 68, 80, 100	TN=Tin plate, SG=Selective gold, GD=Gold flash, GD05=5µ" gold, GD10=10µ" gold, GD15=15µ" gold, GD30=30µ" gold

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **FDPA-HP-XX-XX**

Description: DIP plug, .127mm pitch, high density

