


**SPECIFICATIONS**

Current rating: 3 amps  
 Contact material: Phosphor bronze  
 Insulator material: Polyester, UL 94V-0  
 Contact plating: Gold, tin or duplex  
 Insulator resistance: 5,000 megohms min.  
 Withstanding: 500VAC  
 Operating temperature: -40C° to +105C°

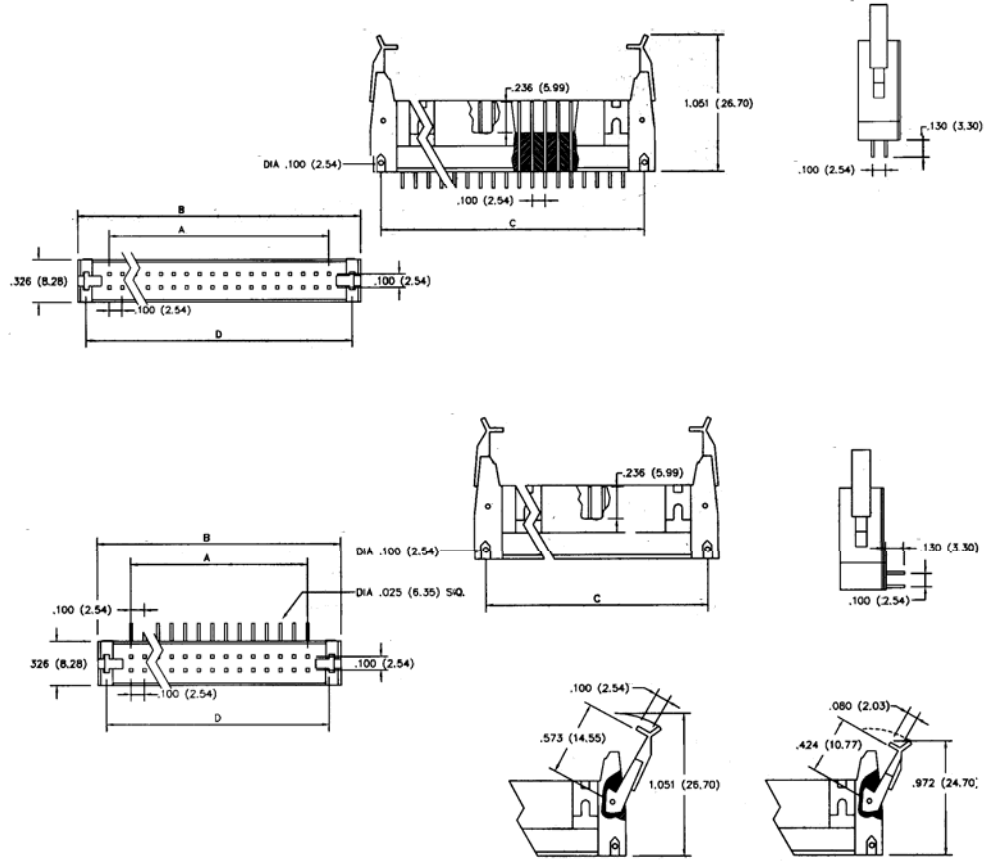

Positions	A	B	C	D
10	10.16	32.00	21.84	27.94
12	12.70	34.54	24.38	30.48
14	15.24	37.08	26.92	33.02
16	17.78	39.62	29.46	35.56
20	22.85	44.70	34.54	40.64
24	27.94	49.78	39.62	45.72
26	30.48	52.32	42.16	48.26
30	35.56	57.40	47.24	53.34
34	40.64	62.48	52.32	58.42
40	48.26	70.10	59.94	66.04
44	53.34	75.18	65.02	71.12
50	60.96	82.80	72.64	78.74
56	68.58	90.42	80.26	86.36
60	73.66	95.50	85.34	91.44
64	78.74	100.58	90.42	96.62

Series	Positions	Mounting	Latch	Plating	Options	
LHD	XX	XX	XX	XX	XX	
Latch header	10, 12, 14, 16, 20, 24, 30, 34, 40, 44, 50, 56, 60, 64	ST=Straight RA=Right angle	SL=Short latch LL=Long latch NL=No latches	GDXX=Gold SGXX=Selective gold TN=Tin	XX=Blank if flash; 15, 30, 50µ" gold	[blank]=None SPL=Custom pin length PF=Press fit (ST only)

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	GD	10/7/05	Tom	Approved	Howard	02/10/97
				Checked	Lizzy	02/10/97
				Drawn	Tina	02/10/97
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **LHD-XX-XX-XX-XX**

Description: Male shrouded latch header