

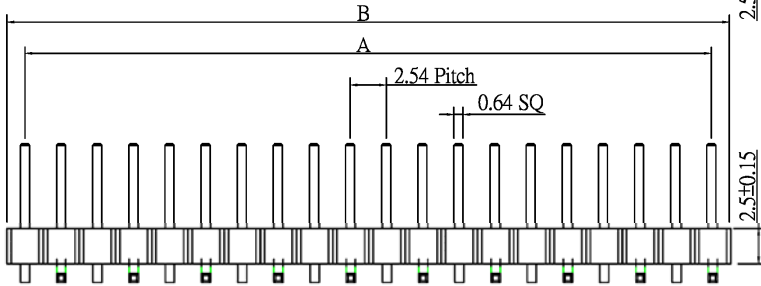



SPECIFICATIONS

Contact Material: Brass
 Insulator Material: Nylon 6T
 Finish: Gold flash over nickel
 Operating Temp: 250°C/10 Sec.

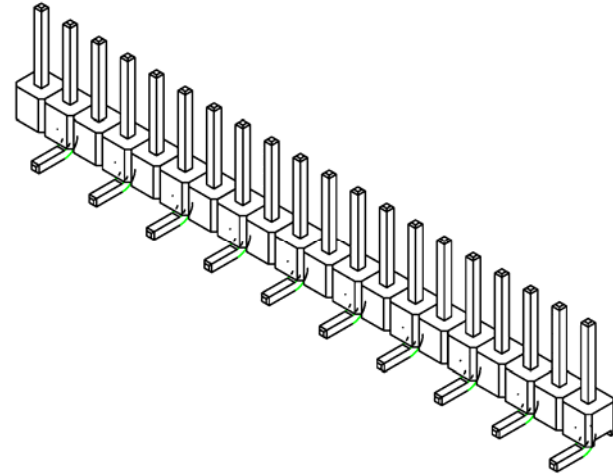

$A = 2.54 * (\text{No of Spaces} - 1)$
 $B = A + 2.54 \pm 0.35$

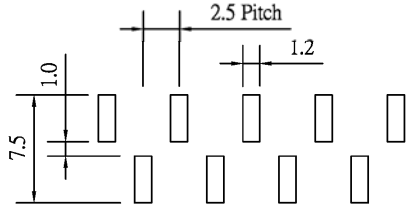

Series	Rows	Total Contacts	Type	Contact length	Plating
APH	X	XX	XX	XXX	XX
Pin header, .100" pitch	1=Single 2=Double	Single row 1-40 Dual row 2-80	Blank=Straight RA=Right Angle SM=Surface Mount	SDA=.240" mating SDB=.318" mating CSL=(A) Custom Length	GDXX=Gold SGXX=Duplex TN=Tin XX=Flash if blank; 15, 30, or 50µ"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/13/08
				Checked	Lizzy	08/13/08
				Drawn	Tina	08/13/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **APH-1-XX-XX-SDB-XX**

Description: Pin Header Single Row SMT Type, 2.54 Pitch