



**Recommended
P.C. Board Hole Layout**



SPECIFICATIONS

Current Rating: 3 Amps
 Insulation Resistance: 1000 Megohms min.
 Contact Resistance: 20m ohms max.
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL94V-0 PBT
 Contact Plating: Gold Flash std
 Withstanding: AC 600V
 Operating Temp: -40C ~ +105C

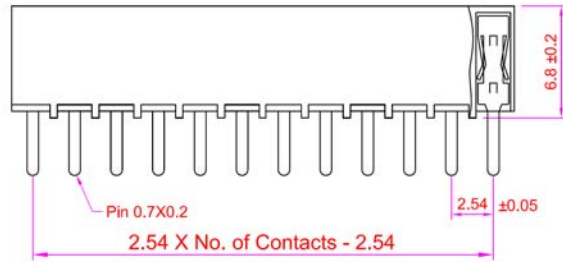

Series	Rows	Style/Profile	Positions	Plating	Options
ARS	0X	BELPC	XX	XX	XX
.100 pitch receptacle strip	01=Single 02=Dual 03=Single RA 04=Dual RA	BELPC=.268" (6.8mm) profile, bottom entry	02-40	TN=Tin SGXX=Selective Gold GDXX=Gold XX=Flash if blank, 3,5,10,15u"	SM=Surface Mount PPL=Pick & Place Cap PPT=Pick & Place Tape TR=Tape & Reel

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/14/11
				Checked	Lizzy	04/14/11
				Drawn	Tina	04/14/11
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **ARS-01-BELPC-XX-XX-XX**

Description: Female Header 2.54mm Pitch, Bottom Entry