


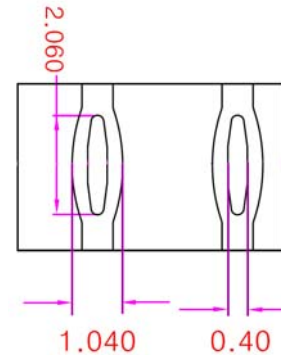


**Recommended
P.C. Board Hole Layout**



SPECIFICATIONS

Current rating: 3 amps
 Contact material: Phosphor bronze
 Contact resistance: 20 milliohms max.
 Contact plating: Gold Flash (std)
 Insulator material: Polyester, UL94V-0
 Insulator resistance: 1,000 megohms min.
 Withstanding: 600VAC for 1 min.
 Operating temperature: -40°C to +105°C

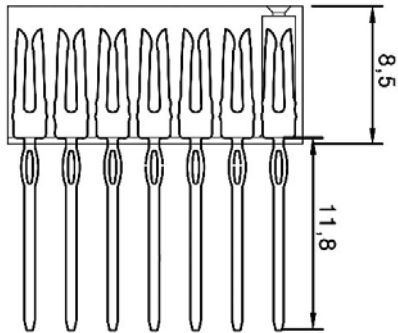

Series	Rows	Contacts	Material	Plating	Options
ARS	02	14	1	XX	PF1
Receptacle strip	02=Dual row	Dual row: 6-72 14 Contacts	1=LCP	TN=Tin GDXX=Gold SGXX=Selective Gold XX=Flash if blank 10,15,30u"	PF1=Custom Press Fit Pin

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	09/21/12
				Checked	Lizzy	09/21/12
				Drawn	Tina	09/21/12
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **ARS-02-14-1-GD-PF1**

Description: Receptacle strip, .100" pitch, dual row, polarized