


SPECIFICATIONS

Current Rating: 3 Amp
 Insulation Resistance: 1000MW Min.
 Contact Resistance: 20mW Max.
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL94V-0 BPT
 Withstanding: 600V AC/DC
 Operating Temperature: -40C to +105C

Recommended P.C.Board Hole Layout

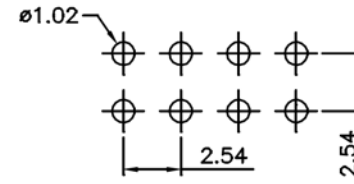

Series	Rows	Options	Profile	Contacts	Plating	Special Options
ARS	XX	XXXX		XX	XX	XX
Receptacle strip	01=Single row 02=Dual row 03=Single row R/A 04=Dual row R/A	DE=Dual entry BE=Bottom entry SE=Side entry P=Polarized	Blank=8.5mm HPB=11.0mm L3=5.65mm	Single row: 3-40 Dual row: 6-72	TN=Tin SGXX=Selective gold GDXX=Gold XX=Flash if blank; 15, 30, 50µ"	[blank]=None SM=Surface mount RT=Retention tails P4C=End Position Removed

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	02/23/10
				Checked	Lizzy	02/23/10
				Drawn	Tina	02/23/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **ARS-02-HPB-XX-XX**

Description: 2.54 Female Header Dual Rows DIP Type Base 11.0H