

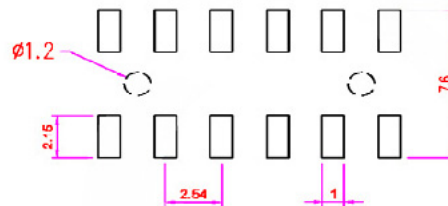


**Recommended
P.C. Board SMD Layout**



SPECIFICATIONS

Current Rating:	3 Amps
Contact Material:	Phosphor Bronze
Contact Resistance:	20 m ohms max.
Insulator Material:	Polyester, UL94V-0
Insulator Resistance:	1000 Megohms Min.
Withstanding:	AC 500V
Operating Temp:	-40°C ~ +105°C

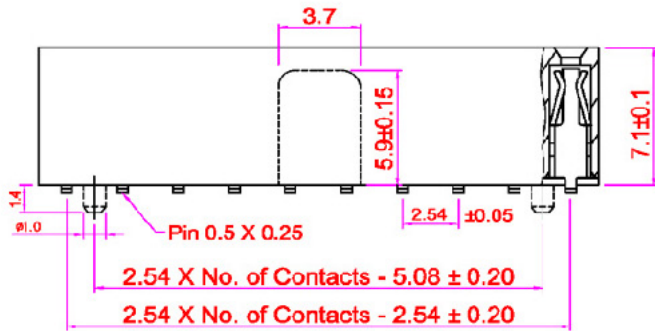

RoHS compliant

Series	Rows	Type	Contacts	Plating	Options	Cap	Packing
ARS	XX	XX	XX	XX	XX	XX	XX
Receptacle Strip	01=Single Row 02=Dual Row 03=Single Row r/a 04=Dual Row r/a	Blank=none DE=Dual Entry BE=Bottom Entry SE=Side Entry LPB=7.1mm LPD=7.4mm	Single Row=3-36 Dual Row=6-72	TN=Tin SGXX=Selective Gold GDXX=Gold XX=Flash if blank, 10,15,30u"	Blank=None SM=Surface Mount RT=Retention Tail P=Polarized CP=Centering Pin	Blank=None PPT=Tape PPL=Plastic Pad PPM=Metal Pad	TB=Tube TR=Tape Reel

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	07/08/08
				Checked	Lizzy	07/08/08
				Drawn	Tina	07/08/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **ARS-02-LPD-XX-XX-SMPCP-XX-XX**

Description: Female Header 2.54 X 2.54mm