


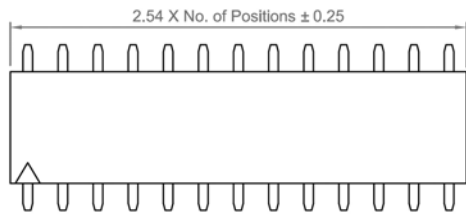


**Recommended  
P.C. Board SMD Layout**




**SPECIFICATIONS**  
 Current Rating: 3 Amps  
 Insulator Resistance: 1000 Megohms min.  
 Contact Resistance: 20m ohms max.  
 Withstanding: AC 600V  
 Operating Temp: -40C ~ +105C  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL94V-0  
 Nylon-6T (std)  
 Contact Plating: Full Gold (std)

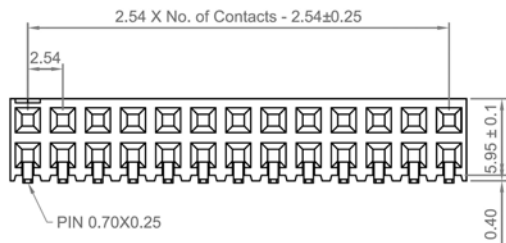

Series	Rows	Profile	Contacts	Plating	Options
ARS	XX	SELPJ	XX	XX	XX
Receptacle Strip	01=Single 02=Dual	6.10mm Side Entry	02-40 Single Row 04-80 Dual Row	TN=Tin GDXX=Gold XX=Flash,10,15,30u"	Blank=None SM=Surface Mount PPF=Film Cap PPM=Metal Cap PPP=Plastic Cap HT=Hi Temp

**RoHS compliant**

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/4/09
				Checked	Lizzy	03/4/09
				Drawn	Tina	03/4/09
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **ARS-02-SELPJ-XX-XX-SM**

Description: Female Header Pitch 2.54mm, 6.10mm Profile, Dual Row, Side Entry