




SPECIFICATIONS

Current rating: 3 amps
 Contact material: Phosphor bronze
 Contact resistance: 20 milliohms max.
 Insulator material: Polyester, UL94V-0
 Insulation resistance: 1,000 megohms min.
 Withstanding: 600 VAC for 1 min.
 Operating temperature: -40°C to +105°C

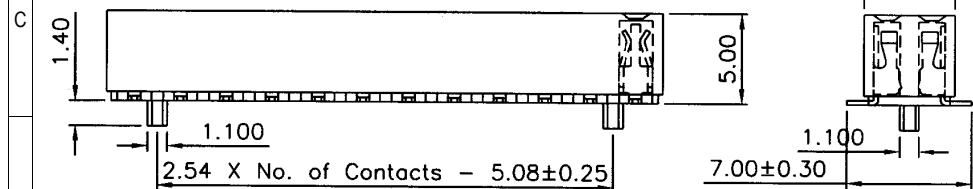

Recommended PCB Layout for bottom entry



Recommended PCB Layout for top entry

RoHS compliant

Series	Style	Positions	Plating	Options
ARS	02	XX	XX	XX
Receptacle strip	Dual row=02	6-80	TN=Tin GD=Gold SG>Selective gold	SM=Surface mount WP=With locating peg (blank)=No options

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **ARS-02-TBE-XX-XX-SM-WP**

Description: Receptacle strip, surface mount, .100" pitch, top or bottom entry with optional locating peg