
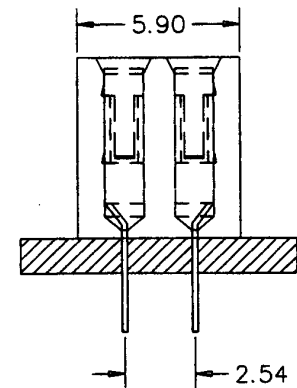
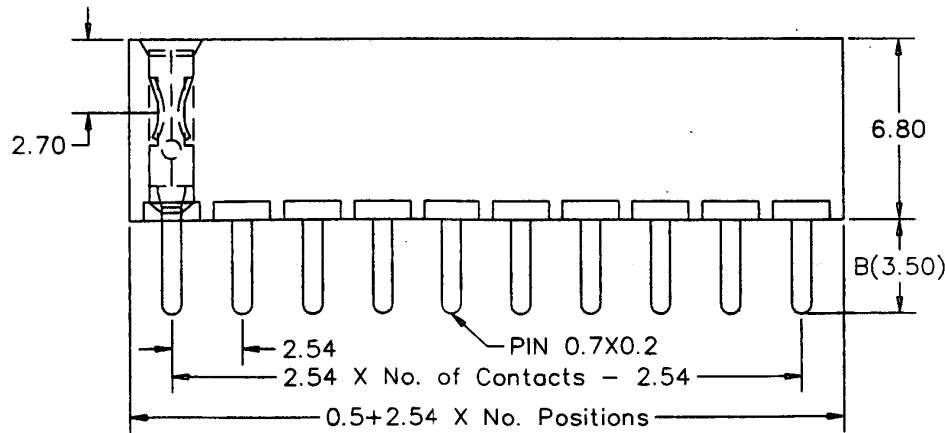


**SPECIFICATIONS**

Current rating: 3 amps  
 Contact material: Phosphor bronze  
 Contact plating: Tin, gold or duplex  
 Contact resistance: 20 milliohms max.  
 Insulator material: Polyester, UL94V-0  
 Insulator resistance: 5,000 megohms min.  
 Withstanding: 500VAC for 1 min.  
 Operating temperature: -40°C to +105°C

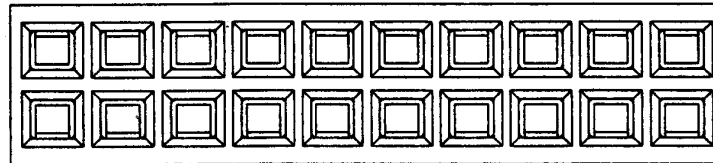

Series	Rows	Contacts	Plating	Special Options
ARS	XX	XX	XX	XX
Receptacle strip	01=Single 02=Double 03=Single right angle 04=Double right angle	Single row, 1-40 pos. Double row, 2-80 pos.	TN=Tin GDXX=Gold plating SGXX=Selective gold XX=Flash if blank, 15, 30, 50µ" gold	SM=Surface mount

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	Address, P/N	02/01/06	Tom	Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **ARS-02-XX-XX-4S**

Description: Receptacle strip, .100" pitch, female, low profile, 4 sided contacts