




**Recommended  
P.C. Board Hole Layout**



**SPECIFICATIONS**

Current Rating: 3 Amps  
 Insulator Resistance: 1000 Megohms min.  
 Contact Resistance: 20mohms max.  
 Withstanding: AC 600V  
 Contact Material: Brass  
 Insulator Material: Polyester, UL94V-0  
 Operating Temp: -40C ~ +105C

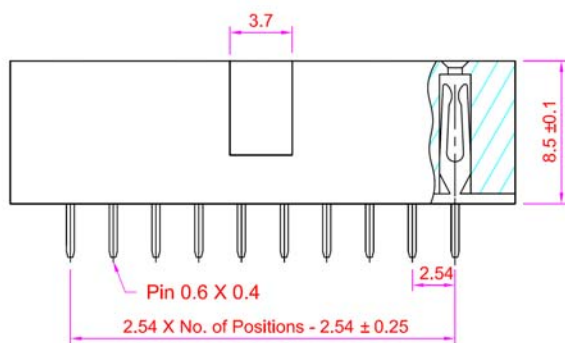

**RoHS compliant**

| Series                        | Rows        | Type        | Contacts       | Plating  |
|-------------------------------|-------------|-------------|----------------|--|
| ARS                           | 02          | XX          | XX             | XX   |
| 2.54mm Pitch Receptacle Strip | 02=Dual Row | P=Polarized | Dual Row=06-72 | TN=Tin<br>SGXX=Selective Gold<br>GDXX=Gold<br>XX=flash if blank,<br>10,15,30u" |

| Rev. | Description | Date   | Approved | Drawing    | Name        | Date        |
|------|-------------|--------|----------|------------|-------------|-------------|
| A    | SPC         | 4/8/09 | GL       | Approved   | Howard      | 08/10/99    |
|      |             |        |          | Checked    | Lizzy       | 08/10/99    |
|      |             |        |          | Drawn      | Tina        | 08/10/99    |
|      |             |        |          | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3' |
|      |             |        |          | UNIT: mm   |             |             |

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **ARS-02-P-XX-XX**  
 Description: Female Header P2.54 x 2.54mm, Dual Row, Straight DIP