



**SPECIFICATIONS**

Current rating: 3 amps  
 Insulator resistance: 5,000 megohms min.  
 Contact resistance: 20 milliohms max.  
 Dielectric withstanding: 1,000 VAC  
 Contact material: Phosphor bronze  
 Insulator material: Polyester PBT, UL94V-0  
 Contact plating (std): Gold flash  
 Contact plating (optional): Gold on contact area  
 Tin on solder area  
 Operating temperature: 40°C to +105°C

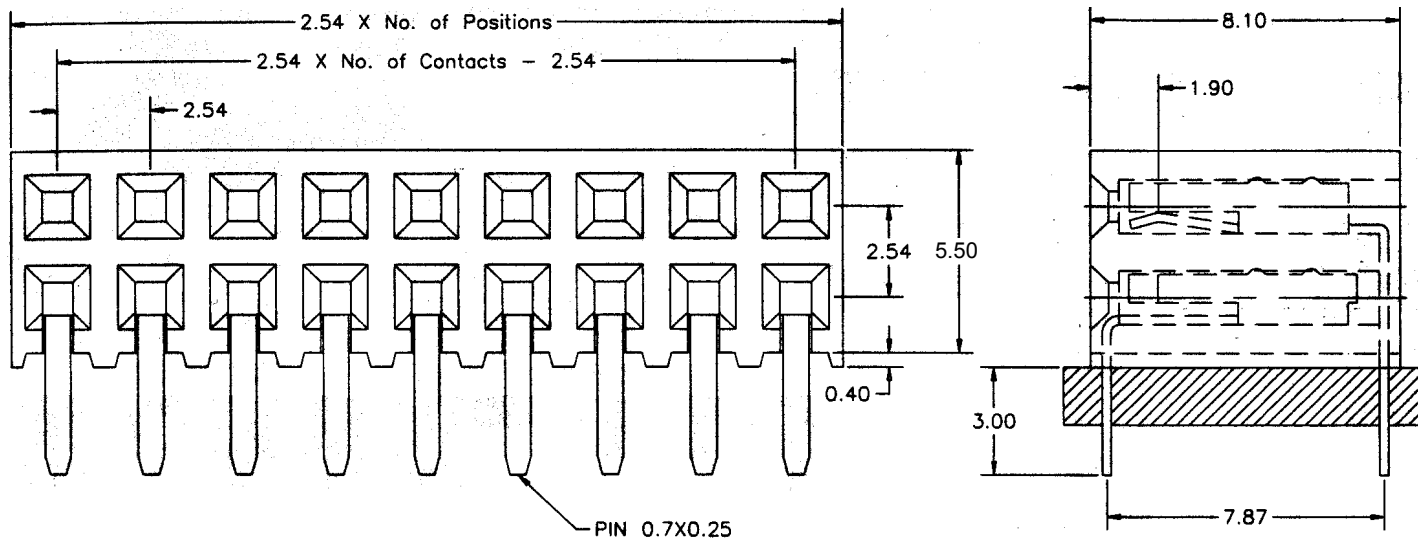

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		



**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **ARS-04-XX-XX-3S**

Description: Receptacle strip, dual row right angle, 3 sided contact