





SPECIFICATIONS


Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstanding Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Contact Material: Brass
 Contact Plating: Au or Sn over Ni
 Insulator Material: Polyester UL94V-0
 Standard: PA6T
 Max Processing Temp: 230C for 30-60 Seconds
 (260°C for 10 seconds)
 Operating Temp: -40°C to +105°C

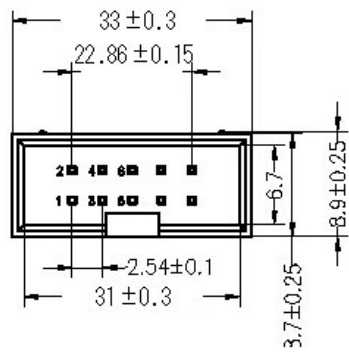


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)



RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	09/23/15
				Checked	Lizzy	09/23/15
				Drawn	Tina	09/23/15
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				 UNIT: mm		



Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: BHD-10-SM-SG-HT

Description: 10 Pos. Surface Mount Shrouded Box Header, High Temp, Selective Gold Plating