




**SPECIFICATIONS**

- Current rating: 2 amps
- Contact material: Brass, Selective Gold Plating
- Contact resistance: 30 milliohms max.
- Insulation material: PBT, glass reinforced, UL94V-0
- Insulation resistance: 3,000 megohms min.
- Withstanding: 500VAC for 1 min.
- Operating temperature: -40°C to +105°C

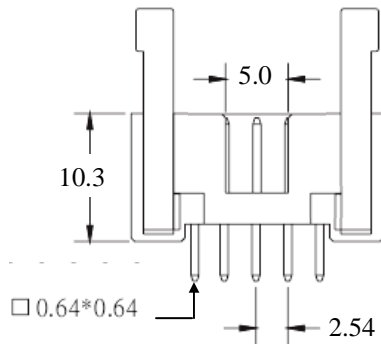

Recommended PC Board Layout

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm
						<b>Central Components Manufacturing</b> 440 Lincoln Blvd., Middlesex, New Jersey 08846 Phone 732 469-5720 888 288-5152 Fax 732 469-1919
						Part No.: <b>BHD-10-ST-SG-SLC</b> Description: Vertical Shrouded header with short side latches, 10 Pos.