



SPECIFICATIONS
 Current rating: 1 amp
 Contact material: Brass
 Contact plating: Gold
 Insulator material: Nylon-6T, UL94V-0, black
 Insulator resistance: 5,000 megohms min.
 Withstanding: 500VAC for 1 min.
 Operating temperature: -40°C to +105°C
 Processing temperature: 230°C /30; 260°C/10 sec.

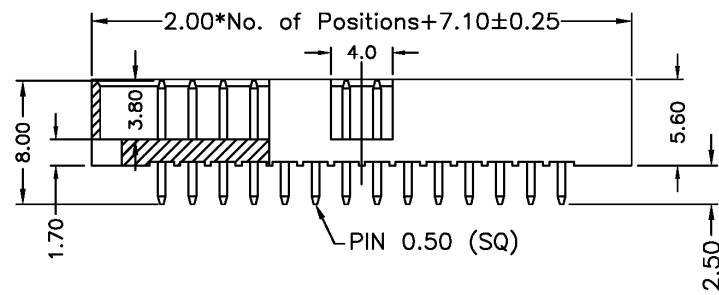

RoHS compliant

Series	Positions	Mounting	Plating
BHD-C	XX	XX	XX
Box header, 2mm by 2mm pitch	6, 8, 10, 12, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60, 64, 68	ST=Straight RA=Right angle	TN=Tin GDXX=Gold SGXX=Selective gold XX=Flash if blank; 15, 30µ" gold

Rev.	Description	Date	Approved	Drawing	Name	Date
A	RoHS/PN info	09/20/05	Tom	Approved	Howard	08/10/98
B	DWG	12/8/09	Greg	Checked	Lizzy	08/10/98
				Drawn	Tina	08/10/98
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BHD-C-XX-XX-XX**

Description: Box header, 0.79 (2mm) by 0.79, PCB mount straight or right angle