

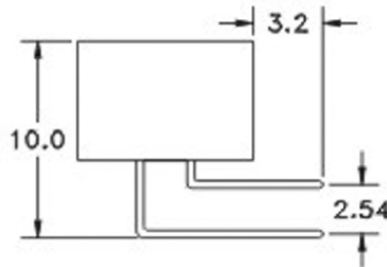


SPECIFICATIONS

Current rating: 1 amp
 Contact material: Phosphor bronze
 Contact resistance: 30 milliohms max.
 Insulation resistance: 1,000 megohms min.
 Withstanding: 250VAC for 1 min.
 Insulator material: PBT, glass reinforced, UL94V-0
 Operating temperature: -40°C to +105°C

Dimensions			
Pos.	A	B	C
10	13.95	11.55	5.08
14	16.49	14.29	7.62
16	17.76	15.36	8.89
20	20.30	17.90	11.43
26	24.11	21.71	15.24
30	26.65	24.25	17.78
34	29.19	26.79	20.32
40	33.00	30.60	24.13
50	39.35	36.95	30.48
60	45.70	43.30	36.83
68	50.78	48.38	41.91
70	52.05	49.65	43.18
80	58.40	56.00	49.53
90	64.75	62.35	55.88
100	71.10	68.70	62.33

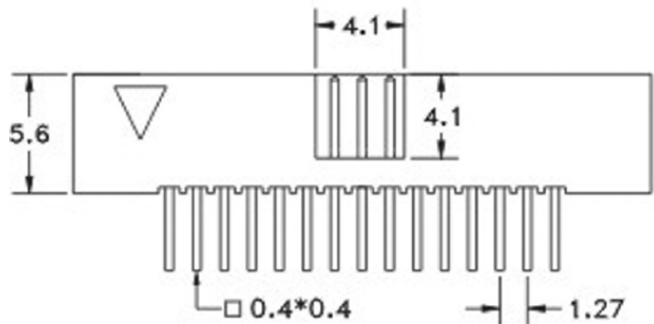

Recommended PC Board Layout

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BHD-D-XX-RA-XX**

Description: Box header, right angle, 1.27mm pitch