

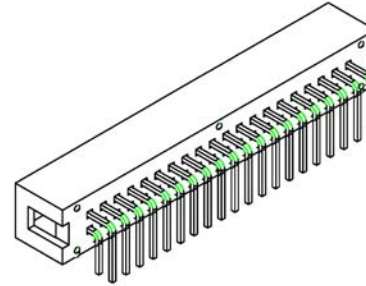
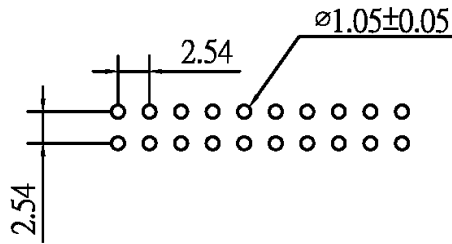


SPECIFICATIONS

Contact material: Brass
 Finish: Gold flash plated over nickel.
 Insulator material: Nylon 6T



| Dimensions | | | |
|------------|-------|-------|-------|
| Pos. | A | B | C |
| 6 | 15.24 | 12.94 | 5.08 |
| 8 | 17.78 | 15.48 | 7.62 |
| 10 | 20.32 | 18.02 | 10.16 |
| 14 | 25.40 | 23.10 | 15.24 |
| 16 | 27.94 | 25.64 | 17.78 |
| 20 | 33.02 | 30.72 | 22.86 |
| 24 | 38.10 | 35.80 | 27.94 |
| 26 | 40.64 | 38.34 | 30.48 |
| 30 | 45.72 | 43.42 | 35.56 |
| 34 | 50.80 | 48.50 | 40.64 |
| 40 | 58.32 | 56.12 | 48.26 |
| 50 | 71.12 | 68.82 | 60.96 |
| 60 | 83.82 | 81.52 | 73.66 |
| 64 | 88.90 | 86.60 | 78.74 |

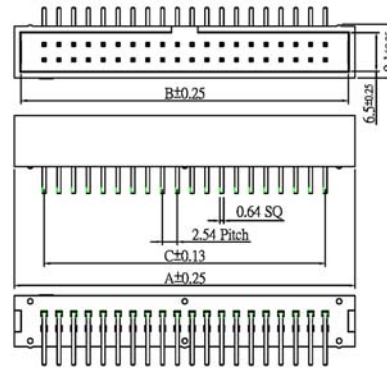

P.C.Board Layout

| Series | Positions | Mounting | Plating | Options |
|------------|-----------|---|---|---|
| BHD | XX | XX | XX | XX |
| Box header | See chart | ST=Straight RA=Right angle RRA=Reverse Right Angle | TN=Tin GDXX=Gold SGXX=Selective gold XX=[Flash if Blank], 15µ", 30µ", 50µ" gold | [blank]=None SM=Surface mount SPL=Special pin length PF=Press Fit KT=Kinked Terminal (Retention Feature) |

RoHS compliant

| Rev. | Description | Date | Approved | Drawing | Name | Date |
|------|-------------|------|----------|------------|-------------|-------------|
| | | | | Approved | Howard | 08/06/07 |
| | | | | Checked | Lizzy | 08/06/07 |
| | | | | Drawn | Tina | 08/06/07 |
| | | | | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3° |
| | | | | | | UNIT: mm |

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BHD-XX-RRA-XX-XX-XX**

Description: 2.54 Pitch Box Header Right Angle