


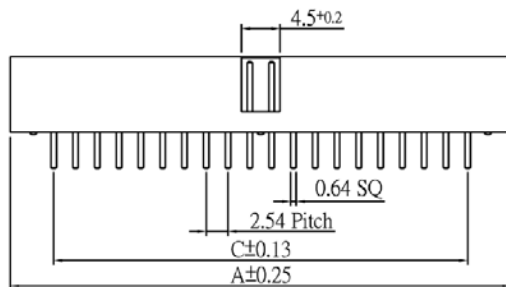


SPECIFICATIONS

Current rating: 3 amps
 Contact material: Brass, 0.64mm square post
 Contact plating: Gold flash over nickel
 Contact resistance: 20 milliohms max.
 Insulation resistance: 5,000 megohms min.
 Withstanding: 500VAC for 1 min.
 Insulator material: Thermoplastic, UL94V-0
 Operating temperature: -40°C to +85°C

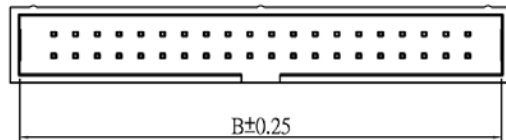

Recommended PC Board Layout

Dimensions			
Pos.	A	B	C
6	15.24	12.94	5.08
8	17.78	15.48	7.62
10	20.32	18.02	10.16
14	25.40	23.10	15.24
16	27.94	25.64	17.78
20	33.02	30.72	22.86
24	38.10	35.80	27.94
26	40.64	38.34	30.48
30	45.72	43.42	35.56
34	50.80	48.50	40.64
40	58.42	56.12	48.26
50	71.12	68.82	60.96
60	83.82	81.52	73.66
64	88.90	86.60	78.74

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BHD-XX-ST-XX-155**

Description: Box header, straight type