



Product Specification

SMD DC Motor 3V

Part Number:
CM-BVC041000M-47NA

TABLE OF CONTENTS

SECTION	DESCRIPTION	PAGE#
1.	SCOPE.....	1
2.	MECHANICAL CHARACTERISTIC.....	1
3.	ELECTRICAL CHARACTERISTICS.....	1
4.	ADDITIONAL INFORMATION.....	2
5.	CRITICAL CHARACTERISTICS.....	2
6.	ENVIRONMENTAL CHARACTERISTICS.....	2
7.	RELIABILITY TESTS.....	2
8.	EXPECTED SHIPPING AND STORAGE CONDITIONS.....	4
9.	QUALITY ASSURANCE.....	4
10.	MATERIALS.....	5
11.	LOT NO. INDICATION ON THE VIBRATOR.....	5
12.	PACKAGING CONDITION	6
13.	RECOMMENDED REFLOW PROFILE FOR VIBRATOR.....	8
14.	NOTES ON USE.....	9
	APPENDIX 1	11
	APPENDIX 2	12

2012/7/25	Specification	No	Page : 1
Part No.	CM-BVC041000M-47NA		

1. SCOPE


This document contains specific electrical and mechanical characters, critical characteristics, reliability tests, packaging condition, quality assurance, reflow profile and etc..

2. MECHANICAL CHARACTERISTIC

- | | | |
|------|---|-----------------------|
| 2.1. | Mechanical drawing | See appendix 2 |
| 2.2. | Axial play of shaft | 0.3 mm Max |
| 2.3. | Counter weight density: | 17.0 g / cc Min |
| 2.4. | Mechanical noise of motor operating at rated speed: | 50 dB Max A-weighting |
| | Background noise 26dB. (Measured distance 10 cm, see appendix 1). | |

3. ELECTRICAL CHARACTERISTICS

- | | | |
|-------|--|--------------------------------------|
| 3.1. | Vibrator positioning: | Horizontal |
| 3.2. | Operating voltage: | 3.0 V |
| 3.3. | Operating voltage range: | 2.3 – 3.6 V |
| 3.4. | Load current at operating voltage: | 85 mA Max |
| 3.5. | Starting current at operating voltage: | 100 mA Max |
| 3.6. | Insulation resistance and voltage breakdown: | at 50V DC, 1M Ω Min and above |
| 3.7. | Terminal resistance: | 35.9 \pm 3.3 Ω |
| 3.8. | Load speed: | 10500 \pm 2500 rpm |
| 3.9. | Rotation direction: | C.W. & C.C.W |
| 3.10. | RPM Rise time (see picture 1) | 80ms Max |
| 3.11. | RPM Fall time (see picture 1) | 100ms Max |

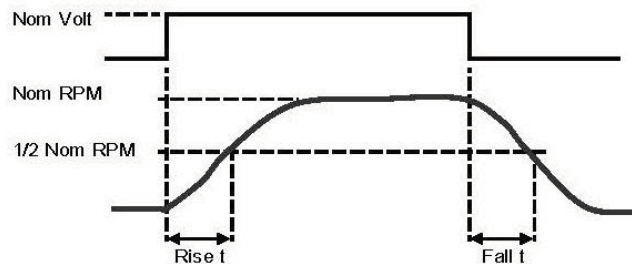

Picture 1 RPM rise and fall time

- 3.12 Standard loaded starting voltage: Under standard loaded condition, towards C.W. rotor shall move in all position at 2.3V (counterweight should be turned slowly at 360°)

All mechanical and electrical measurements should be measured at room temperature and ordinary humidity.

2012/7/25	Specification	No	Page : 2
Part No.	CM-BVC041000M-47NA		

4. ADDITIONAL INFORMATION

- 4.1. Vibrator weight 1.12g
- 4.2. Pull out strength of counter weight and shaft 50N Min
- 4.3. Acceleration level at nominal RPM (Grms) (test jig mounted in freely suspended)
- 4.4. Speed and current variation (function of temperature, -20°C to +70°C)

5. CRITICAL CHARACTERISTICS

- 5.1. Functional dimensions
- 5.2. Rated current at specified rotating speed
- 5.3. Operating speed at operating voltage
- 5.4. Starting current at operating voltage
- 5.5. Min. starting Voltage

6. ENVIRONMENTAL CHARACTERISTICS

- 6.1. Operating temperature ranges: -20°C to +70°C
- 6.2. Storage temperature ranges: -40°C to +85°C

7. RELIABILITY TESTS

- 7.1. We have already performed reliability tests and measure nom rotation speed, nom load current, nom resistance, nom starting currents and nom starting voltage before and after tests, please check following table1 for detail reliability test information. Each test we use at least 10 samples for verification.

	Items	Test conditions	Judgment
7.2	Cold	<p>Storage test -40±3°C/300h. 65±5%RH, Recovery 24 h Measurements with test jig</p>	<p>No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)</p>

2012/7/25	Specification	No	Page : 3
Part No.	CM-BVC041000M-47NA		

7.3	Cold	<p>Operational test</p> <p>Apply operating voltage, $-20 \pm 3^\circ\text{C}/12\text{h}$. $65 \pm 5\% \text{RH}$</p> <p>No recovery. Measurements with test jig.</p>	<p>No mechanical damage.</p> <p>Normal performance of vibrator.</p> <p>(Max +/-30% variation of nom RPM)</p>
7.4	Dry heat	<p>Storage test</p> <p>$+85 \pm 3^\circ\text{C}/300\text{h}$. $60 \pm 5\% \text{RH}$. Recovery 24h.</p> <p>Measurements with test jig.</p>	<p>No mechanical damage.</p> <p>Normal performance of vibrator.</p> <p>(Max +/-30% variation of nom RPM)</p>
7.5	Damp heat	<p>Operational test</p> <p>Apply operating voltage, $+60 \pm 3^\circ\text{C}/12\text{h}$. $90 \pm 5\% \text{RH}$.</p> <p>No recovery. Measurements with test jig.</p>	<p>No mechanical damage.</p> <p>Normal performance of vibrator.</p> <p>(Max +/-30% variation of nom RPM)</p>
7.6	Temperature cyclic test	<p>Storage test</p> <p>18h/cycles, total 10cycles. Recovery 1-2 h.</p> <p>Performance check weekly.</p> <p>Measurements with test jig.</p>	<p>No mechanical damage.</p> <p>Reduced performance of vibrator.</p> <p>(Max +/-30% variation of nom RPM)</p>

2012/7/25	Specification	No	Page : 4
Part No.	CM-BVC041000M-47NA		

7.7	Lifetime test	Operational test. Temperature: 20±5°C, 65±15%RH, 2s On / 2s Off. 300000 cycles. Recovery 1-2h. Measurements with test jig.	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)
7.8	Free Fall	Mount the vibrator in the dummy box.(dummy box weight 100g), Drop height 1.5 m onto concrete. 3 times in each 6 directions. All Measurements with test jig.	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)
7.9	Packing fall	Drop the packing condition from 0.6m onto the concrete floor. 1 time in 6 directions, 1 corner and 3 edges.	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)
7.10	vibration test	10 ~60 Hz, 2.1G ~80Hz, 1.4G ~100Hz, 0.7G 5min, X,Y each 2h,Z,4h ~125Hz, 0.4G Measurements with test jig.	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)
7.11	Packing vibration	5~50Hz, 1.56G 9Hz/min, X,Y,Z each 2H	No mechanical damage. Normal performance of vibrator. (Max +/-30% variation of nom RPM)

Table1 Reliability test

8. EXPECTED SHIPPING AND STORAGE CONDITIONS

- | | | |
|------|-------------------------------|------------------------|
| 8.1. | Relative humidity | 15%~70% |
| 8.2. | Temperature | -5°C~40°C |
| 8.3. | Sulphur dioxide average | 0.3 mg/m ³ |
| 8.4. | Sulphuretted hydrogen average | 0.1 mg/ m ³ |
| 8.5. | Maximum storage period | 12 months |

(Vibrator has to be rotated at least once within 12 mouths from the date of receipt)

9. QUALITY ASSURANCE

All critical parameters are 100% in control. The symbols "◆" apply to all parameters identified as critical

2012/7/25	Specification	No	Page : 5
Part No.	CM-BVC041000M-47NA		

parameters in all process. And before mass production approval, we use Process Capability Study (PCS) to conduct all critical parameters in mass production. Based on PCS the final quality controls will be agreed.

Quality assurance for mass production:

- Lot acceptance rate (LAR)
- First pass yield (FPY)
- Outgoing quality level
 - Each final packing containing Out-going inspection data sheet (n=35pcs)
 - Inspection item: Load speed
 - Load current
 - Starting current
 - Starting voltage
 - Coil resistance
- Customer reject material rate
- Customer satisfaction
- Cpk/Cp control for all critical parameters (except starting voltage)

10. MATERIALS


- Counterweight
- Brush
- Commutator
- Case
- Terminal
- Bracket
- Washer
- End cover
- Bearing
- Magnet
- Copper wire
- Shaft
- Core
- Shaft support plate
- Varistor (optional)

P.S.: All the materials included in vibrator can meet RoHS requirement.

11. LOT NO. INDICATION ON THE VIBRATOR

Following markings are the definition of lot no. indication on the vibrator, which including production code and date code; please see picture 2 as below for detail information:

2012/7/25	Specification	No	Page : 6
Part No.	CM-BVC041000M-47NA		

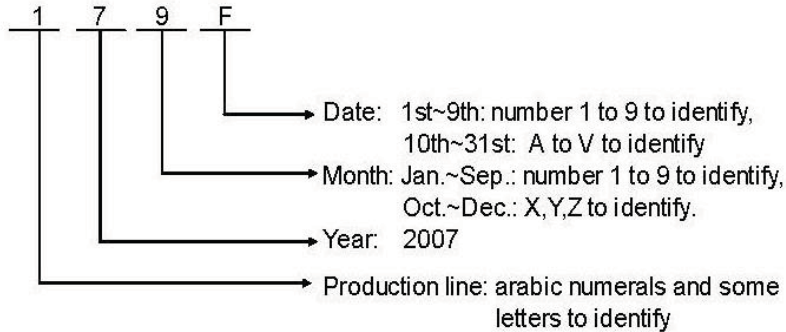


Date	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Lot No. Indication	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G	H	I	G	K
Date	21	22	23	24	25	26	27	28	29	30	31									
Lot No. Indication	L	M	N	O	P	Q	R	S	T	U	V									
Production line code	V1	V2	V3	V4	V5	V6	V7	V8	V9	V10	V11	V12	V13	V14	V15	V16	V17	V18	V19	V20
	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G	H	I	G	K

Picture 2 Lot No. indication

12. PACKAGING CONDITION

A detailed mechanical drawing for packing condition as followed with dimensions and tolerances:


12.1 Smallest packing

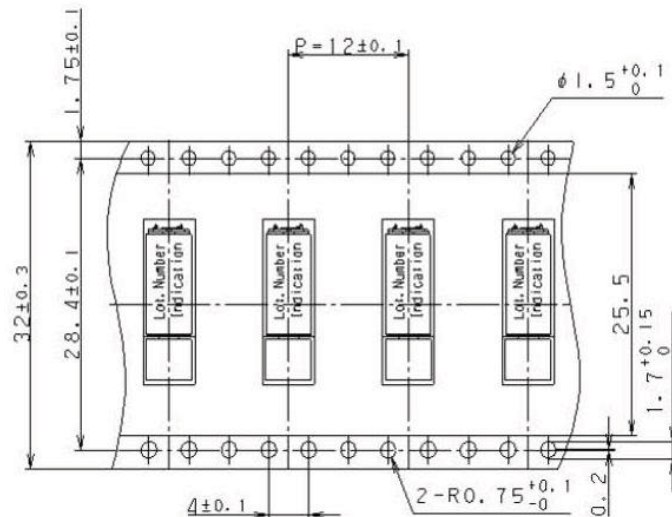

Picture 3 Smallest packing condition

2012/7/25	Specification	No	Page : 7
Part No.	CM-BVC041000M-47NA		

12.2 Reel packing condition

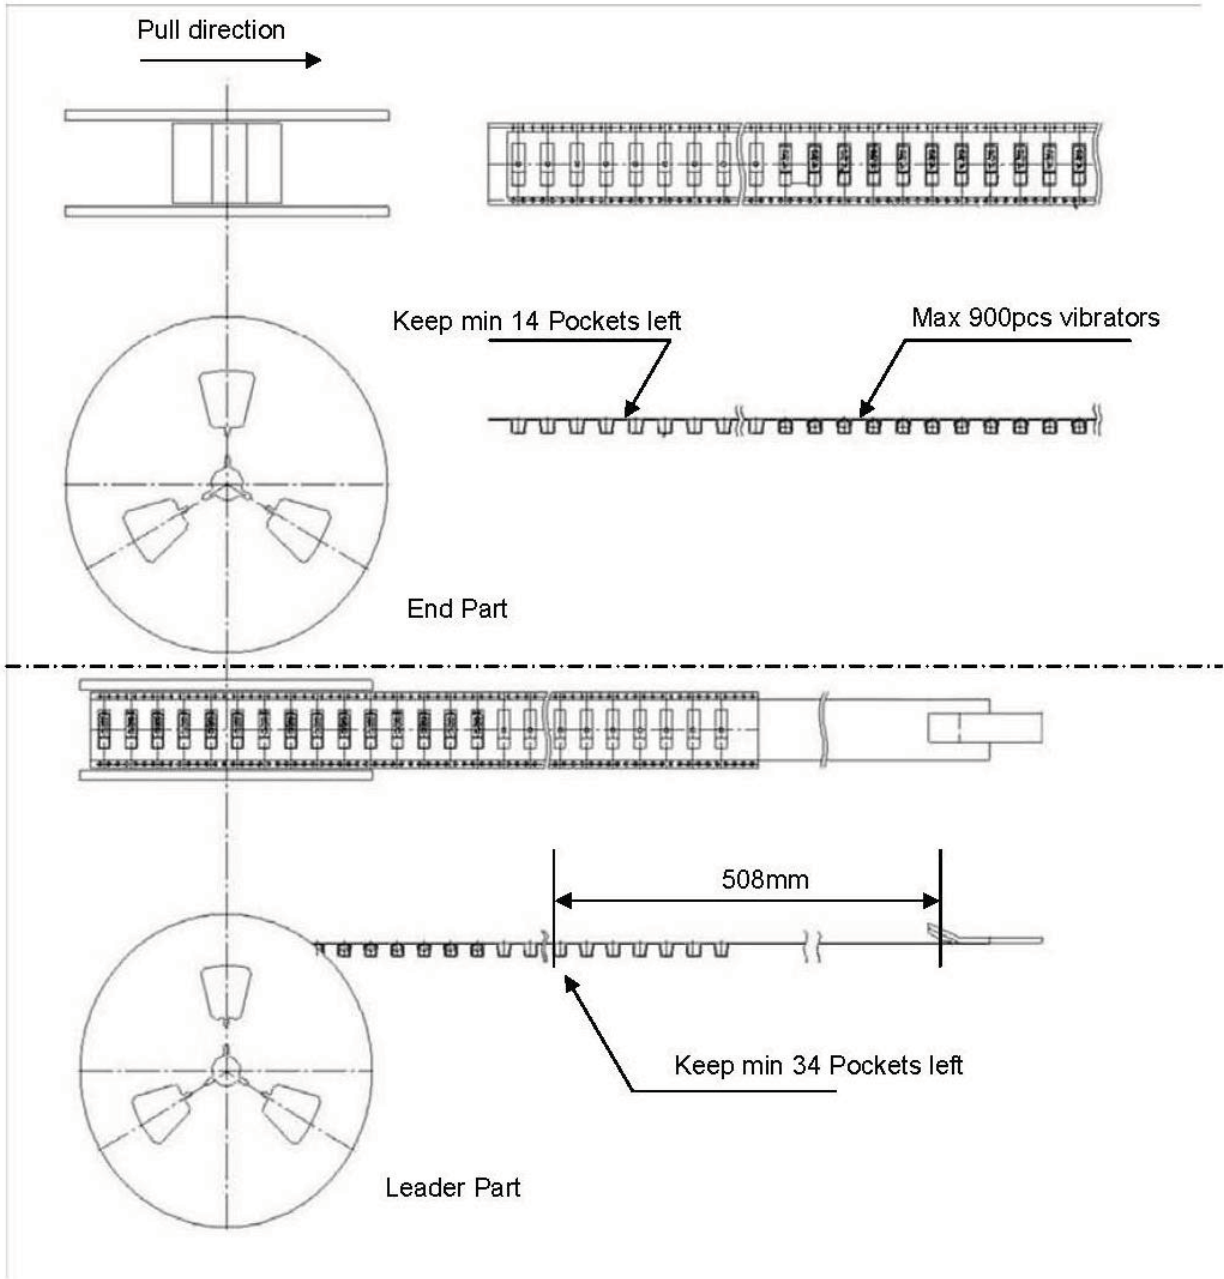

Picture 4 Reel packing condition

2012/7/25	Specification	No	Page : 8
Part No.	CM-BVC041000M-47NA		

13. RECOMMENDED REFLOW PROFILE FOR VIBRATOR

13.1 Definitions

Reflow Profile = Time vs. temperature plot

Peak temperature = Maximum temperature reached on the component

Convection = Forced air heating

13.2 Recommended temperature check method of reflow furnace

The reflow furnace used should be 100% convection reflow. Thermocouples should be securely attached to the top surface of vibrator to insure the temperature exposure is met. Profile should be recorded by data acquisition for future reference.

13.3 Recommended reflow Profile


The reflow profile specified in this section describes expected maximum heat exposure of vibrators during the reflow process. This test must meet or exceed all times shown as following. All temperatures shown are $\pm 5/-0^{\circ}\text{C}$. Ramp-up rate to 217°C shall be no quicker than $3^{\circ}\text{C}/\text{second}$ at any time, so parts must withstand this rate of rise in any zone.

All vibrators have to tolerate at least this profile two times without affecting electrical performance, mechanical performance or reliability. Please see Pb-free reflow profile requirement for soldering heat resistance on table 2 and Reflow profile for soldering heat resistance testing picture 6 :

Pb-free reflow profile requirements for soldering heat resistance		
Parameter	Reference	Specification
Average temperature gradient in preheating		$2.5^{\circ}\text{C}/\text{s}$
Soak time	Tsoak	2-3 mins
Time above 217°C	t1	Max 60s
Time above 230°C	t2	Max 50s
Time above 245°C	t3	Max 10s
Peak temperature in reflow	T peak	$250^{\circ}\text{C} (-0/+5^{\circ}\text{C})$
Temperature gradient in cooling		Max $-5^{\circ}\text{C}/\text{s}$

Table 2 Pb-free reflow profile requirement for soldering heat resistance

2012/7/25	Specification	No	Page : 9
Part No.	CM-BVC041000M-47NA		

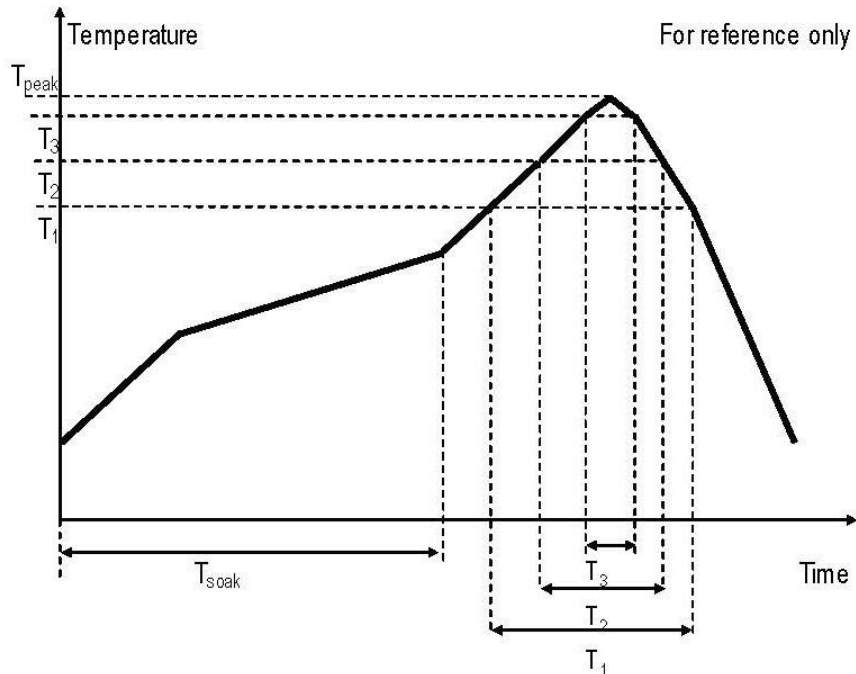

Picture 6 Reflow profile for soldering heat resistance testing

14. NOTES ON USE

- 14.1 Pay attention to the voltage and current ranges which applied to the vibrator, and use the vibrator in accordance with this specification, otherwise, it will reduce the life and performance of the vibrator.
- 14.2 Do not use hot gun to puff the surface of vibrator from PCB directly.
- 14.3 Do not locking the motor with current applied for long time, which may cause the motor to overheat and short circuit.
- 14.4 Do not exert pressure the terminals, otherwise, it will result in terminal deformation.
- 14.5 Do not bring magnetized objects near or contact with the surface of vibrator, which will demagnetize the magnetism of vibrator and result in noise failure.

2012/7/25	Specification	No	Page : 10
Part No.	CM-BVC041000M-47NA		

Appendix 1

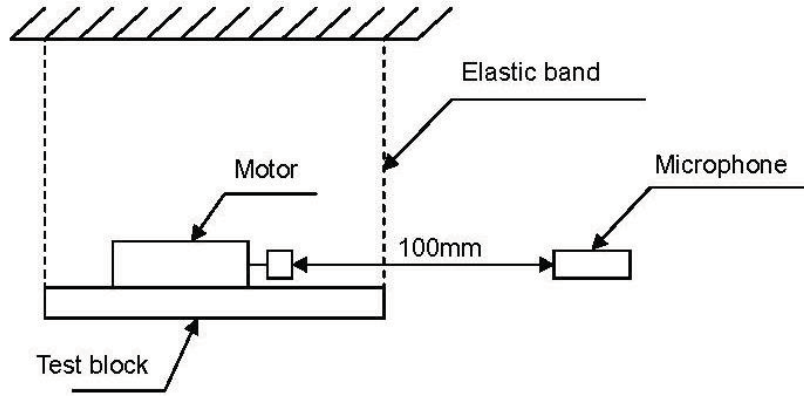


Figure 1.

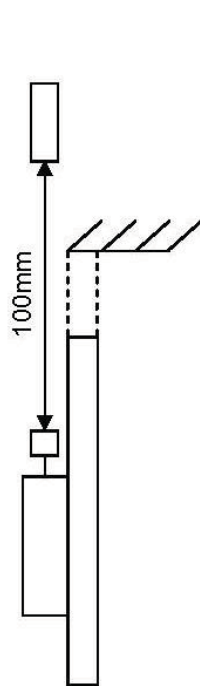


Figure 2.


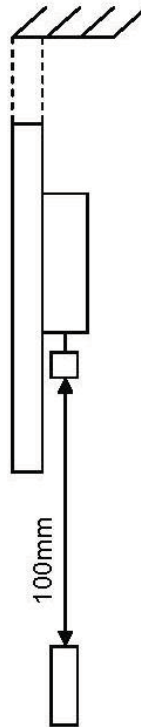


Figure 3.

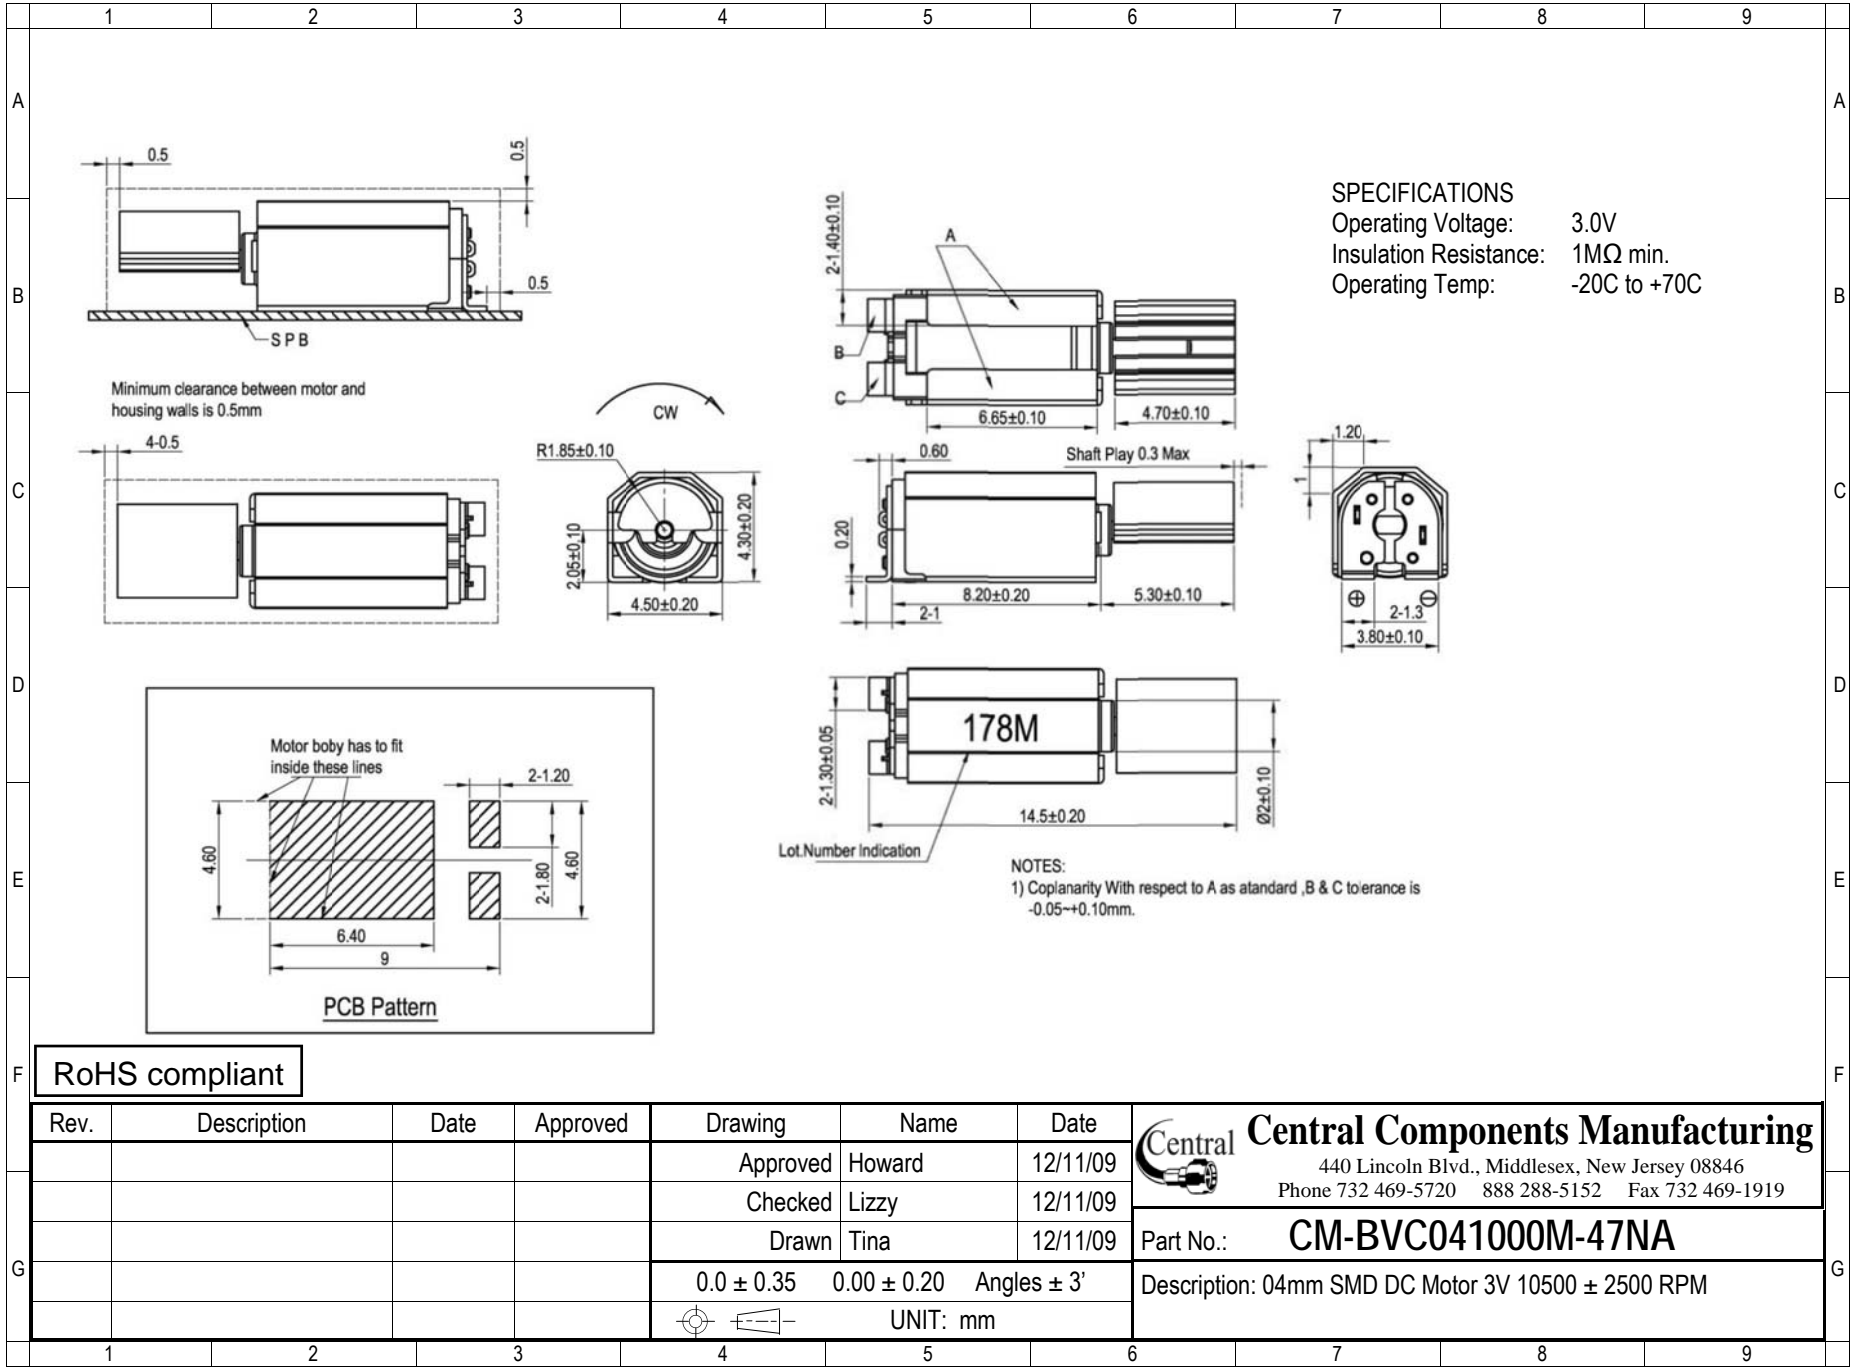

SPECIFICATIONS
 Operating Voltage: 3.0V
 Insulation Resistance: 1MΩ min.
 Operating Temp: -20C to +70C

NOTES:
 1) Coplanarity With respect to A as standard, B & C tolerance is -0.05--+0.10mm.

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	12/11/09
				Checked	Lizzy	12/11/09
				Drawn	Tina	12/11/09
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CM-BVC041000M-47NA**

Description: 04mm SMD DC Motor 3V 10500 ± 2500 RPM