


SPECIFICATIONS

Current rating: 1 amp
 Contact material: Copper alloy
 Contact plating: Selective gold
 Contact resistance: 35 milliohms max.
 Insulation resistance: 500 megohms min.
 Withstanding: 500VAC for 1 min.
 Housing material: PBT, UL94V-0, black
 Front shell material: Steel
 Front shell plating: Nickel over copper
 Operating temperature: -55°C to +105°C

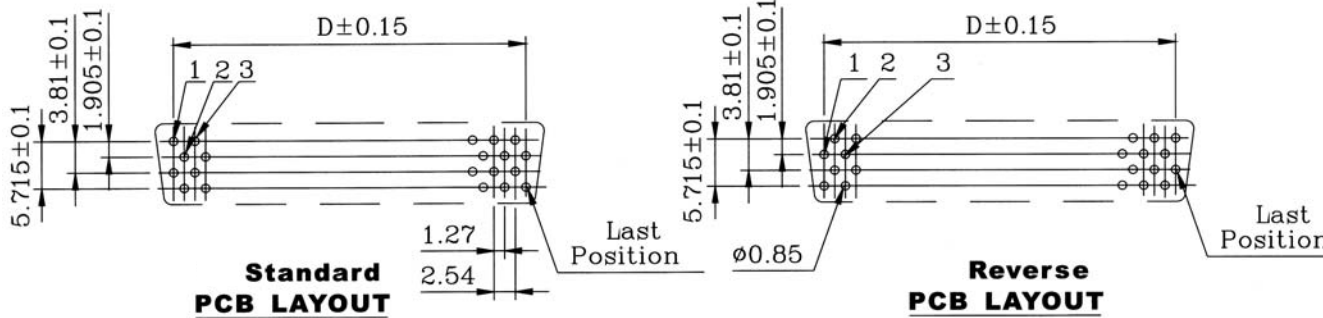

Dimensions				
Contacts	A	B	C	D
26	24.00	19.65	09.30	15.24
36	30.40	25.96	08.50	21.59
40	32.95	28.50	09.30	24.13
50	39.30	34.85	09.30	30.48
68	50.70	46.35	09.30	41.90
100	71.05	66.68	09.30	62.23

Series	No. of Contacts	Gender	Contact Plating	PCB Layout
CMDD	XX	X	SGXX	X
1.27mm SCSI header	26, 36, 40, 50, 68, 100	M=Male F=Female	SG5=5µ" gold SG15=15µ" gold SG30=30µ" gold	S=Standard R=Reverse

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	PNT	5/6/08	Greg	Approved	Howard	04/02/07
				Checked	Lizzy	04/02/07
				Drawn	Tina	04/02/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMDD-50-M-SGXX-X**

Description: 1.27mm SCSI header, male