




SPECIFICATIONS

Voltage rating: 200 VAC max.
 Current rating: 2 amps max.
 Contact material: Phosphor bronze
 Contact plating: Gold over nickel
 Contact resist.: 20 milliohms max.
 Housing material: PC UL94V-2
 Insulation resist.: 500 megohms min.
 Withstanding: 1,000 VAC min.
 Shield material: Phosphor bronze
 Shield plating: Tin
 Operating temp.: -35°C to +125°C




4 Position

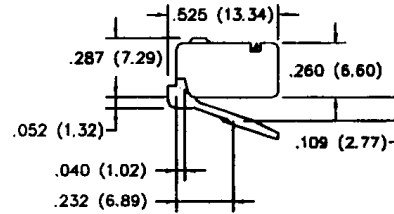



FLAT CABLE




ROUND CABLE




6 Position

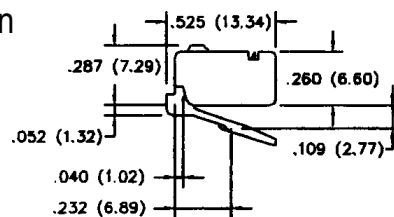



FLAT CABLE




ROUND CABLE



8 Position

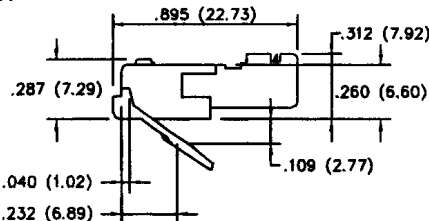

FLAT CABLE



ROUND CABLE

10 position also available

Series	Plug Size	Contacts	Plating	Options
CTP	XX	X	PX	XX
Modular plug	4, 6, 8, 10	2, 4, 6, 8, 10	P1=15µ" gold P2=30µ" gold P3=50µ" gold	[blank]=Oval (flat) RW=Round wire SD=.8 dia. conductor SW=Solid wire (stranded if omitted) MS=Metal shield KY=Keyed OS=Offset latch

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/96
				Checked	Lizzy	08/10/96
				Drawn	Tina	08/10/96
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CTP-XX-X-PX-XX**

Description: Modular telephone plug