

SPECIFICATIONS

Current Rating: 5A
 Insulator: High Temp Plastic UL94V-0
 Contact: Copper Alloy
 Shell: Stainless Steel
 Contact Resistance: 30mohm max
 Withstanding: 100V RMS
 Insulation Resistance: 100Mohm min
 Mating Force: 5-20N
 Unmating Force: 8-20N
 Durability: 10000 cycles
 Terminal Contact: Gold over Nickel
 Shell: 50u" Nickel
 Operating Temp: -40C to +85C

Series	Type	Style	Ports/Gender/Cont/Mount	Housing Material	Shell Plating	Contact Plating
CUSB	C	SA3110	1F24RT	L	N	GD50
USB Connector	Type C 3.1	See Drawing	Single Port Female 24 Contacts, R/A Through Hole	LCP	Nickel	50μ gold


RoHS compliant


Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/27/15
				Checked	Lizzy	03/27/15
				Drawn	Tina	03/27/15
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		


Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-C-SA3110-1F24RT-L-N-GD50**

Description: USB type C 3.1 female shielded through hole

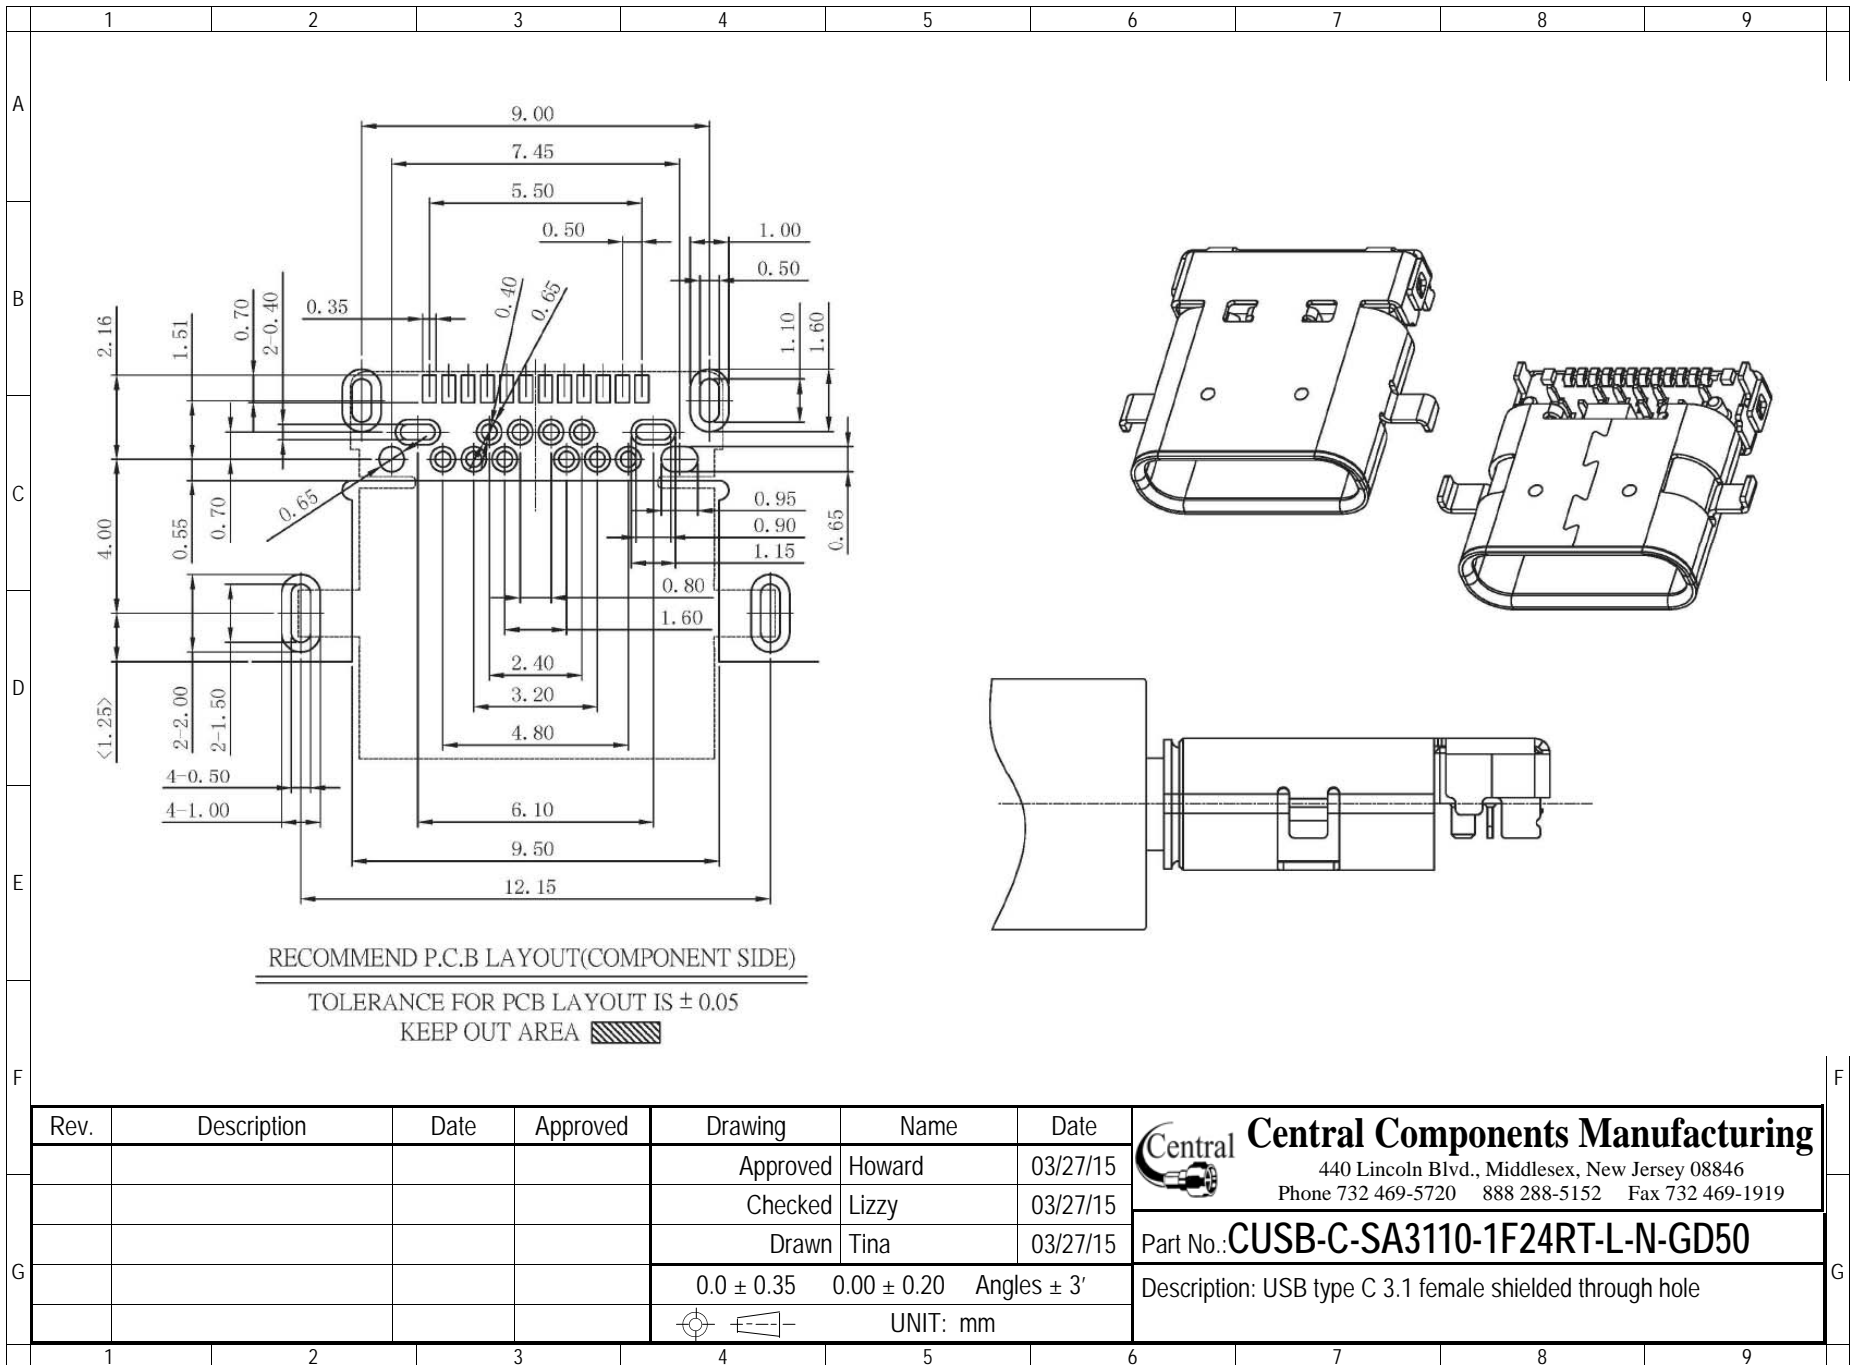

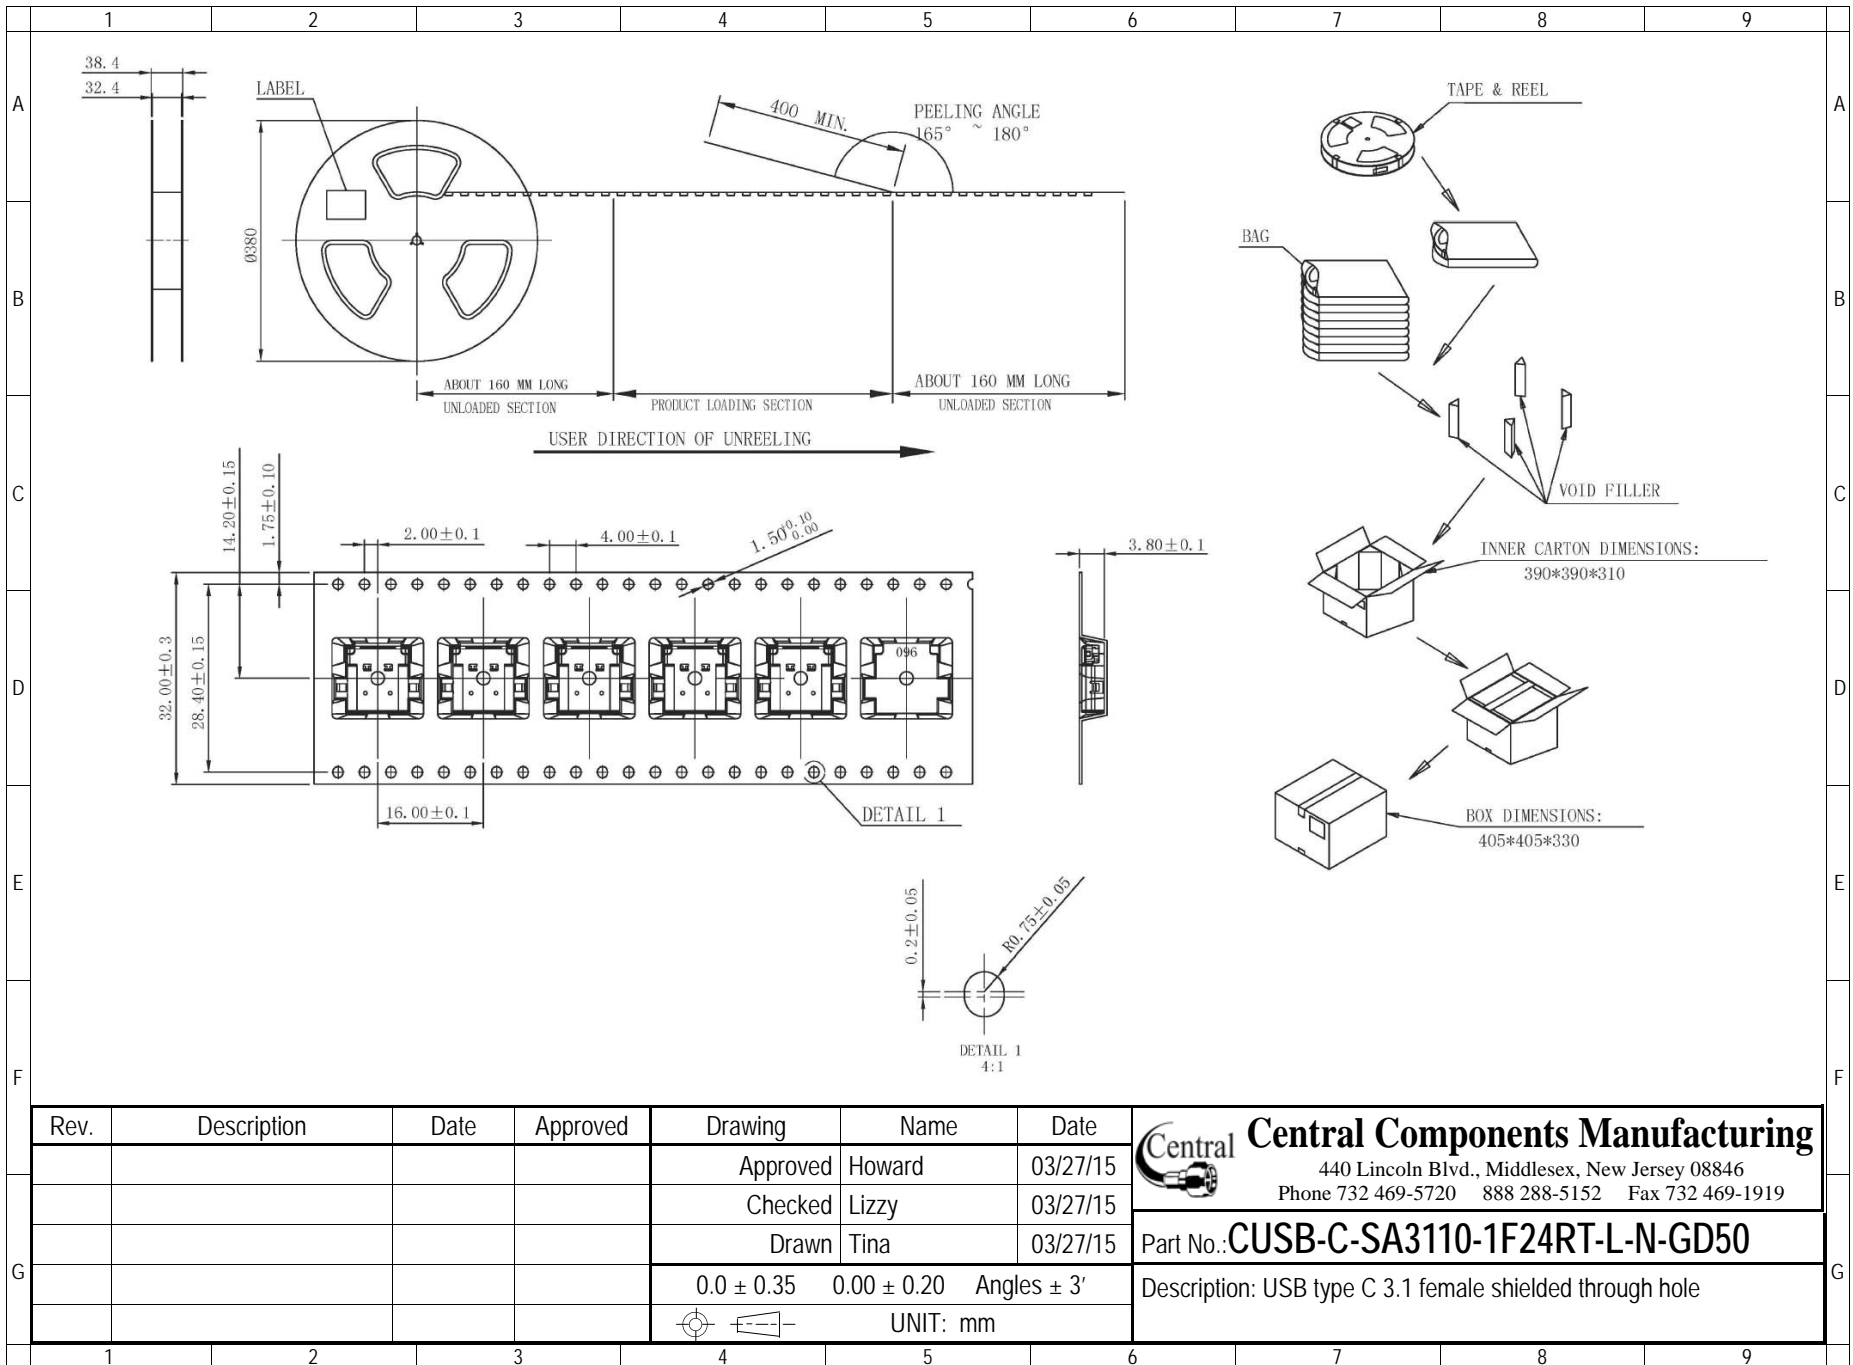

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/27/15
				Checked	Lizzy	03/27/15
				Drawn	Tina	03/27/15
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				 UNIT: mm		


Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CUSB-C-SA3110-1F24RT-L-N-GD50**

Description: USB type C 3.1 female shielded through hole