

SPECIFICATIONS

Turn Ratio:	TX=1CT:1CT, RX=1CT:1CT
Insertion Loss :	-1.2
Return Loss:	1-10MHz = -18 30MHz = -16 60-80MHz = -12
Crosstalk:	1-10MHz = -40 30-60MHz = -35 60-100MHz = -30
Common Mode Rejection:	1-50MHz = -30 50-130MHz = -20
Hipot:	1500


RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	05/19/09
				Checked	Lizzy	05/19/09
				Drawn	Tina	05/19/09
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **GCTJ-08-2-62F1204LGY-8-BK-PX**

Description: 10/100 Base-T RJ45 Tab-Down Dual Jack with Magnetics

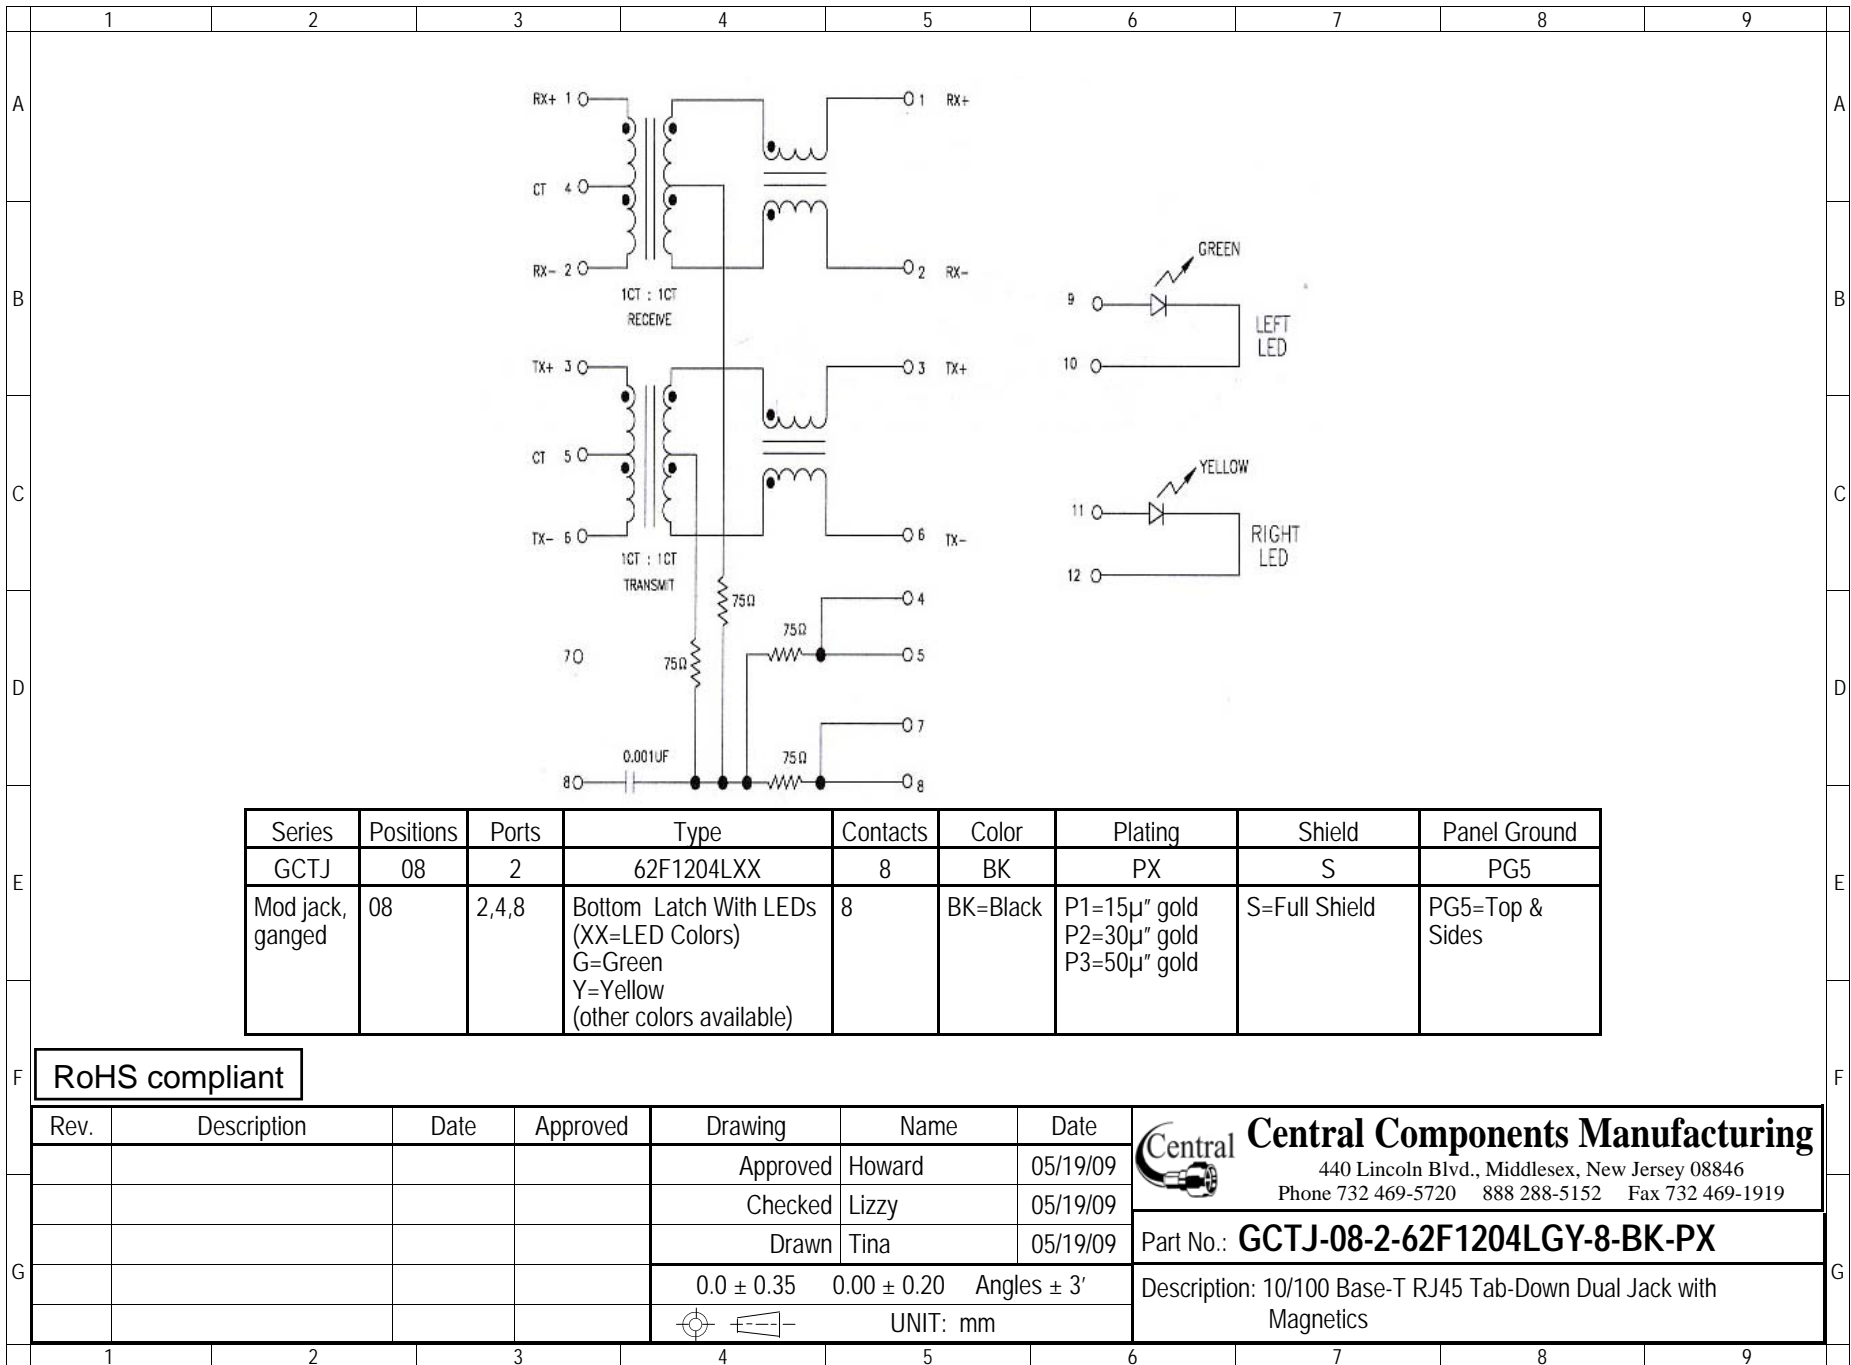

Series	Positions	Ports	Type	Contacts	Color	Plating	Shield	Panel Ground
GCTJ	08	2	62F1204LXX	8	BK	PX	S	PG5
Mod jack, ganged	08	2,4,8	Bottom Latch With LEDs (XX=LED Colors) G=Green Y=Yellow (other colors available)	8	BK=Black	P1=15μ" gold P2=30μ" gold P3=50μ" gold	S=Full Shield	PG5=Top & Sides

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	05/19/09
				Checked	Lizzy	05/19/09
				Drawn	Tina	05/19/09
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **GCTJ-08-2-62F1204LGY-8-BK-PX**

Description: 10/100 Base-T RJ45 Tab-Down Dual Jack with Magnetics