
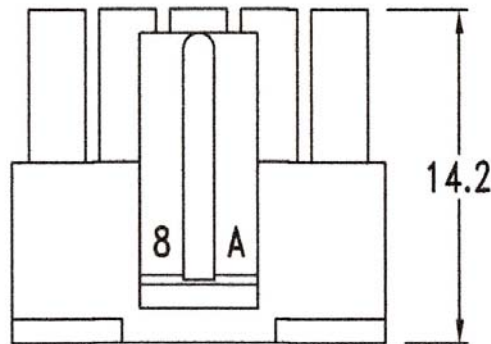


**SPECIFICATIONS**

Current Rating: #20:5A, #22:5A, #24:4A, #26:3A, #28:2A, #30:1A  
 Voltage Rating: 250V AC, DC  
 Housing Material: Nylon 66, UL94V-0  
 Insulation Resistance: 1000MQ Min.  
 Contact Plating: Tin-plated Brass  
 Withstanding: 1500V AC  
 Temperature Rise: 30°C Max.



Dimensions					
Circuits	A	B	Circuits	A	B
2	3.0	7.0	8	21.0	25.0
3	6.0	10.0	9	24.0	28.0
4	9.0	13.0	10	27.0	31.0
5	12.0	16.0	11	30.0	34.0
6	15.0	19.0	12	33.0	37.0
7	18.0	22.0			

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	4/19/01
				Checked	Lizzy	4/19/01
				Drawn	Tina	4/19/01
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-A-3025-XXS**

Description: .118 Single Row Receptacle Housing