



SEC. A-A

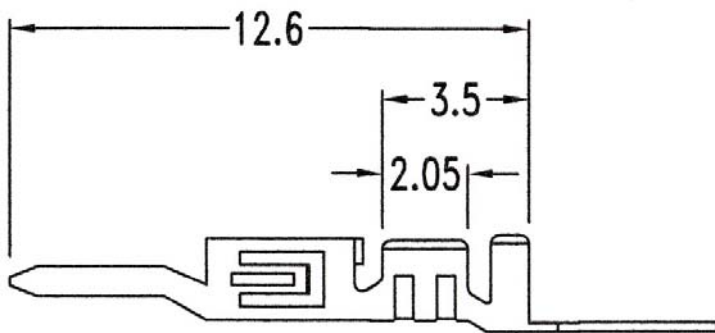

SEC. B-B

SPECIFICATIONS

Current Rating:	#20:5A, #22:5A, #24:4A, #26:3A #28:2A, #30:1A
Voltage Rating:	250V AC, DC
Contact Material:	Phosphor Bronze
Contact Resistance:	10mΩ max.
Withstanding:	1500V AC
Temperature Rise:	30°C max.

Part No.	Finish	Wire Size	Dim a	Dim b	Dim c	Dim d
3031T1	Tin-Plated	#26 ~ #30 AWG	1.8	1.6	2.4	1.9
3031T1-xGC	Gold flash in contact area. Others: Tin-plated					
3031T1-xGF	Gold Flash					
3031T2	Tin-Plated	#20 ~ #24 AWG	2.1	2.1	2.7	2.4
3031T2-xGC	Gold flash in contact area. Others: Tin-plated					
3031T2-xGF	Gold flash					

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	7/29/00
				Checked	Lizzy	7/29/00
				Drawn	Tina	7/29/00
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-A-3031T**

Description: .118 Crimp Terminal