
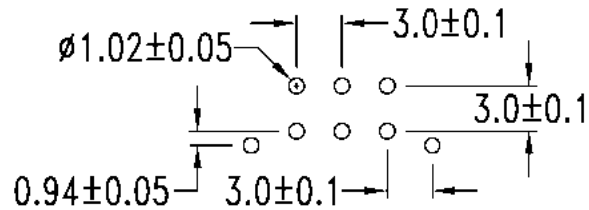
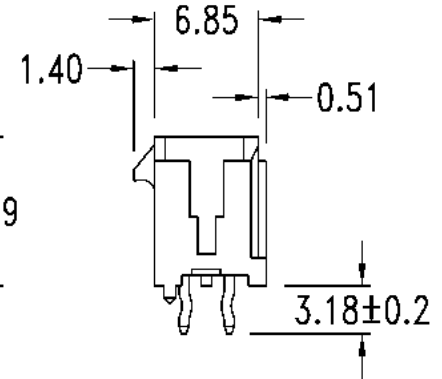



SPECIFICATIONS

Voltage rating: 250 volts
 Current rating: See table
 Contact pin material: Brass (0.64mm sq.)
 Contact pin plating: Bright tin
 Contact resistance: 10 milliohms max.
 Housing material: Nylon 66, 30% glass fill, UL94V-0, black
 Withstanding: 1,500VAC for 1 min.
 Operating temperature: -25°C to +85°C
 Processing temperature: 240°C/5 sec.
 Circuits: 2 to 24

Current rating	
Wire size	Amps
AWG 20	5
AWG 22	5
AWG 24	4
AWG 26	3
AWG 28	2
AWG 30	1


Dimensions		
Pos.	A	B
2		6.0
4	3.0	9.0
6	6.0	12.0
8	9.0	15.0
10	12.0	18.0
12	15.0	21.0
14	18.0	24.0
15	21.0	27.0
18	24.0	30.0
20	27.0	33.0
22	30.0	36.0
24	33.0	39.0



PCB Layout: Component side
 Recommended PCB thickness: .062" (1.57mm)

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	RoHS, spec	09/20/05	Tom	Approved	Howard	08/10/99
B	Spec	10/04/05	Tom	Checked	Lizzy	08/10/99
C	P/N	10/30/07	Tom	Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles $\pm 3^\circ$
				UNIT: mm		



Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-A-3045-XX**

Description: Header, 3mm pitch, dual row, vertical