

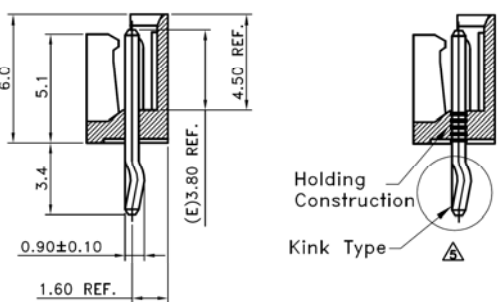
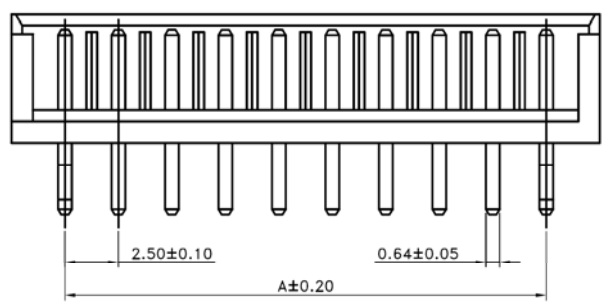
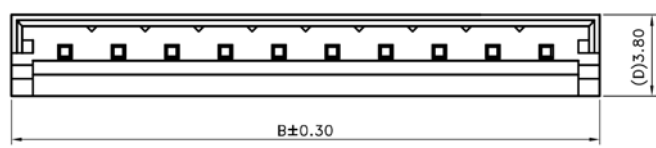


Recommended PCB Layout (Top View)



Dimensions		
Poles	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

SPECIFICATIONS
 Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Insulation Resistance: 1000MΩ min
 Contact Resistance: 20mΩ max
 Withstanding Voltage: 800V AC/minute
 Temperature Range: -25C to +85C

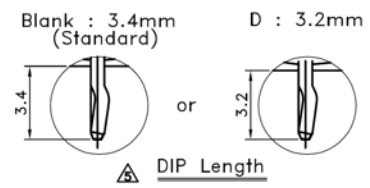

Series	Type	Positions	Dip Length	Plating	Options	Color
JS-CH	1132	XX	X	XX	X	XX
PCB Connector	2.5mm R/A Header	02-15	Blank=3.4mm (std) D=3.2mm	TN=Tin GD=Gold	Blank=None H=Holding Pin K=Kinked Pin	Blank=Natural (std) RD=Red YL=Yellow BK=Black BL=Blue

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/04
				Checked	Lizzy	08/10/04
				Drawn	Tina	08/10/04
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-CH-1132-XX**

Description: 2.50mm Crimp Style Connector Wafer

