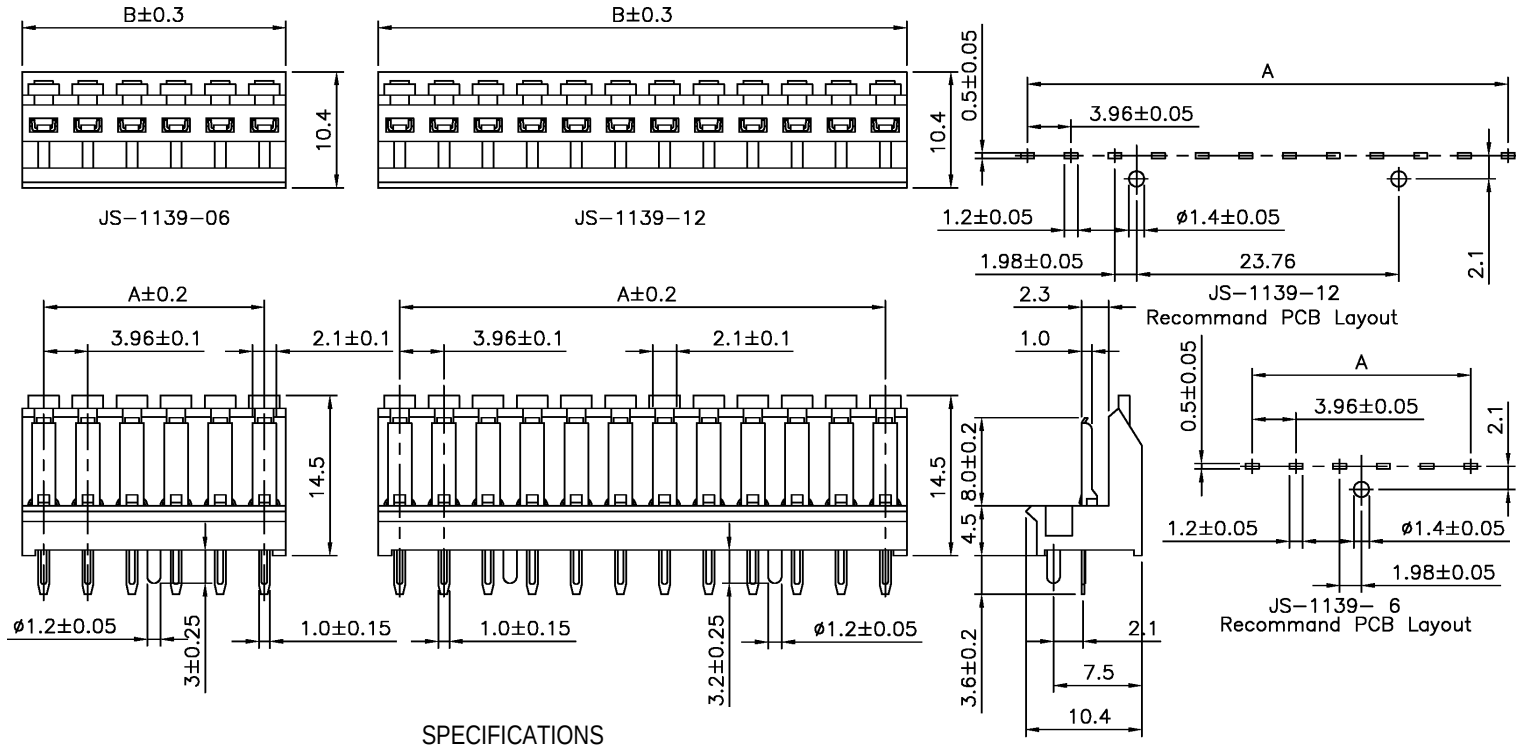

SPECIFICATIONS

Voltage rating:	250VAC/VDC
Current rating:	5 amps
Contact material:	Brass
Contact plating:	Tin
Contact resistance:	20 milliohms max.
Housing material:	Nylon 66, UL94V-2
Insulation resistance:	1,000 megohms min.
Withstanding:	1,500 VAC for 1 min.
Operating temperature:	-25°C to +85°C

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3’
					UNIT: mm	

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-CH-1139-XX**

Description: Header, .156” pitch, vertical, 6 or 12 position