
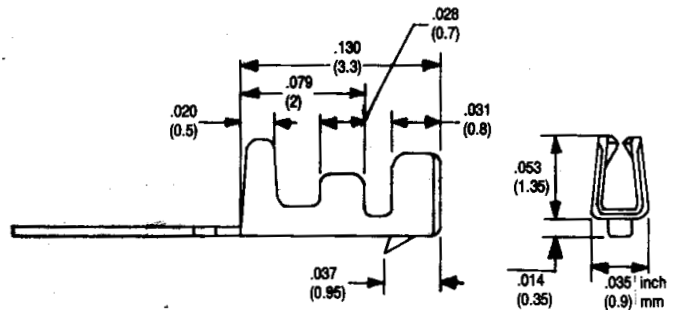




JS-1146

Dimensions mm (in)			
Pos.	A	B	C
2	4.25 (.167)	2.95(.116)	1.25(.049)
3	5.50 (.217)	4.20(.165)	2.50(0.98)
4	6.75 (.266)	5.45(.216)	3.75(.148)
5	8.00 (.315)	6.70(.264)	5.00(.197)
6	9.25 (.364)	7.95(.313)	6.25(.246)
7	10.50 (.413)	9.20(.362)	7.50(.295)
8	11.75 (.463)	10.95(.411)	8.75(.344)
9	13.00 (.512)	11.70(.461)	10.00(.394)
10	14.25 (.561)	12.95(.510)	11.25(.443)
11	15.50 (.610)	14.20(.559)	12.50(.492)
12	16.75 (.659)	15.45(.608)	13.75(.541)
13	18.00 (.709)	16.70(.657)	15.00(.591)
14	19.25 (.758)	17.95(.756)	16.25(.640)
15	20.50 (.807)	19.20(.756)	17.50(.689)

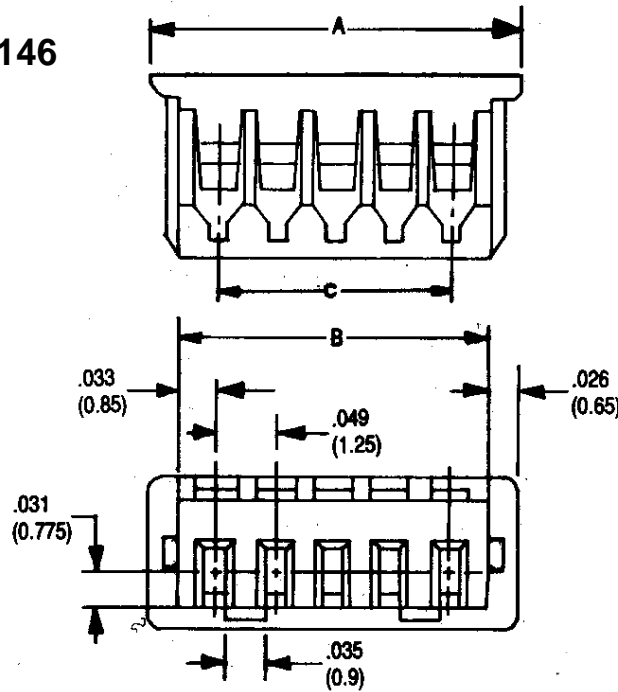

SPECIFICATIONS

- Voltage rating: 250 volts
- Current rating: 1 amp
- Contact material: Brass
- Contact plating: Tin
- Contact resistance: 10 milliohms max.
- Insulation resistance: 100 megohms min.
- Insulation material: Nylon 66, UL94V-0
- Withstand voltage: 250 VAC for 1 min.
- Temperature range: -25°C to +85°C
- Poles: 2-15

JS-1146T

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-CH-1146**

Description: Disconnectable connector, .049" (1.25mm) pitch