



JS-1156 wafer, top entry type (180°)

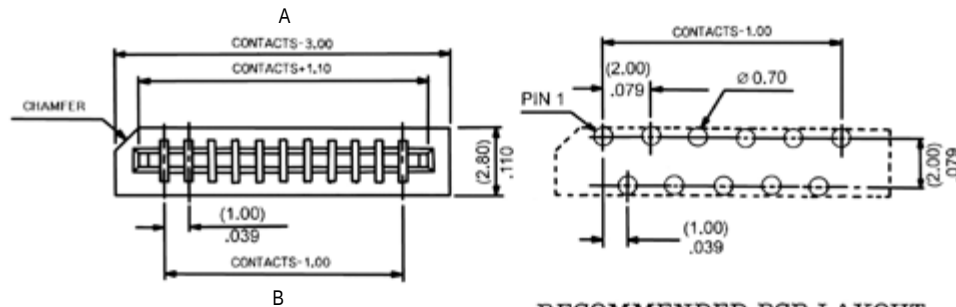

RECOMMENDED PCB LAYOUT

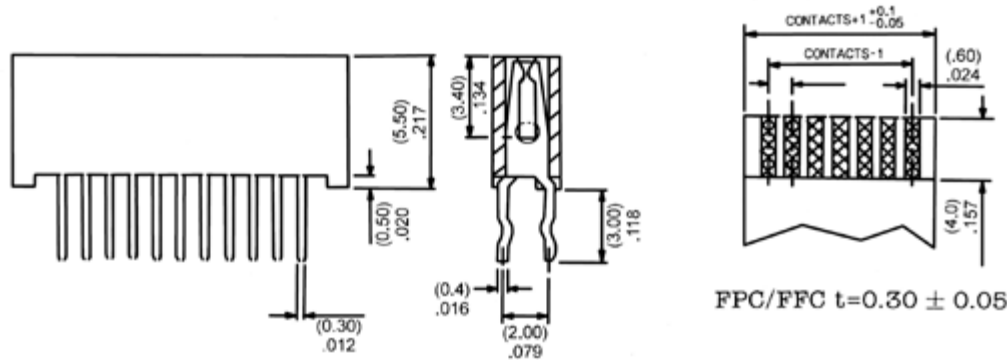

FPC/FFC t=0.30 ± 0.05

SPECIFICATIONS


Current rating:	0.5 amps
Contact material:	Phosphor bronze
Contact plating:	Tin
Contact resistance:	20 milliohms max. at 500VDC
Housing material:	High temperature UL94V-0
	Designed to withstand IR and VPR soldering methods
Operating temperature:	-55°C to +85°C

Dimension	3 thru 32 positions
A	No. of positions x 1.0+3
B	No. of positions x 1.0-1.0

Packaging
TY=Tray
BK=Bulk
TB=Tube

Series	Contacts
JS-1156R	XX
FFC/FPC connector	3-32 contacts

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date	 Central Components Manufacturing 440 Lincoln Blvd., Middlesex, New Jersey 08846 Phone 732 469-5720 888 288-5152 Fax 732 469-1919 Part No.: JS-CH-1156-XX Description: FFC/FPC connector, 1.0mm pitch, non-ZIF, right angle			
				Approved	Howard	08/10/99				
				Checked	Lizzy	08/10/99				
				Drawn	Tina	08/10/99				
				0.0 ± 0.35 0.00 ± 0.20 Angles ± 3'						
				 UNIT: mm						
1	2	3	4	5	6	7	8	9		