



JS-2000H-01

**SPECIFICATIONS**  
 Voltage Rating: 300-600V AC/DC  
 Current Rating: 9-15A AC/DC  
 Withstanding Voltage: 1500V AC/minute  
 Insulation Resistance: 1000mΩ min  
 Temperature Range: -20C to +85C  
 Contact Resistance: 20mΩ max  
 Poles: 1,2  
 Material: Nylon 66 UL94V-0

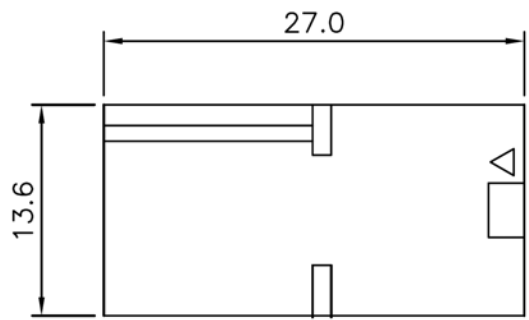

Series	Type	Positions
JS-CH	2000X	XX
Pluggable Connector	Wire to Wire Housing 2000H=Plug 2000W=Receptacle	Single Row: 01, 02, 03, 04S Multi Row: 04, 06, 09, 12, 15 TH=Terminal 14-18 AWG TL=Terminal 18-22 AWG

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	07/01/05
				Checked	Lizzy	07/01/05
				Drawn	Tina	07/01/05
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3°
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-CH-2000H-XXS**

Description: 2.00mm Power Connectors Terminal

