


Pos.	A	B	C
2	2.5	5.7	7.3
3	5.0	8.2	9.8
4	7.5	10.7	12.3
5	10.0	13.2	14.8
6	12.5	15.7	17.3
7	15.0	18.2	19.8
8	14.5	20.7	22.3
9	20.0	23.2	24.8
10	22.5	25.7	27.3
11	25.0	28.2	29.8
12	27.5	30.7	32.3
13	30.0	33.2	34.8
14	32.5	35.7	37.3
15	35.0	38.2	39.8
20	47.5	50.7	52.3

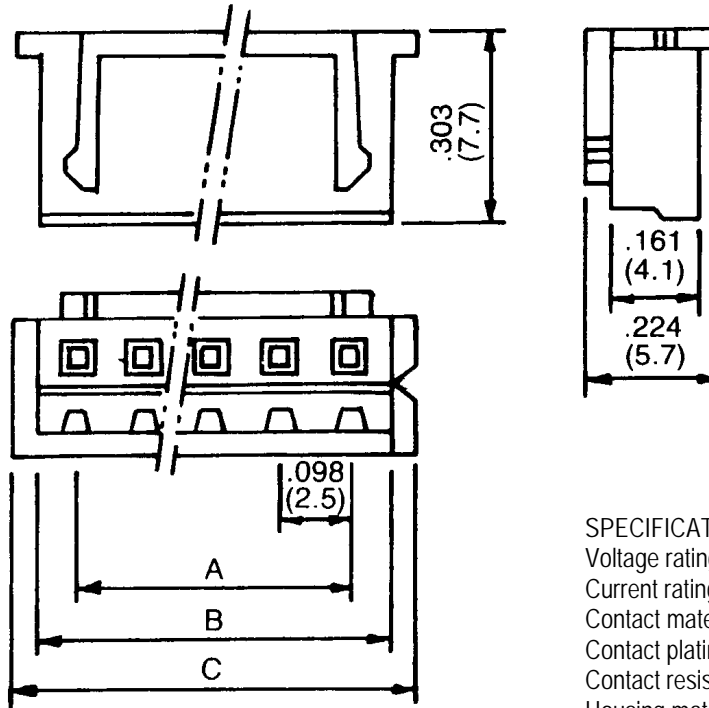

SPECIFICATIONS

Voltage rating: 250V
 Current rating: 3 amps
 Contact material: Phosphor bronze or brass
 Contact plating: Tin 40μ"
 Contact resistance: 20 milliohms max.
 Housing material: Nylon 66, UL94V-0
 Withstanding: 1,000 VAC for 1 min.
 Insulation resistance: 1,000 megohm min.
 Temperature range: -25°C to +85°C

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-CH-2001-XX**

Description: Disconnectable connector, 2.5mm (0.098") pitch