

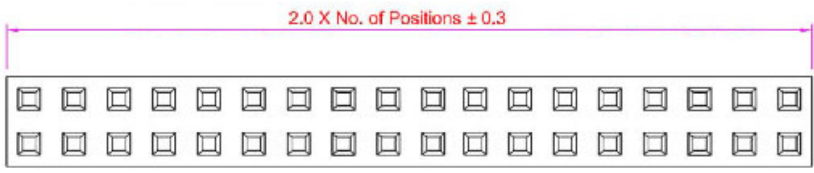



SPECIFICATIONS


Current Rating:	2 Amps
Contact Material:	Phosphor Bronze
Insulator Material:	Polyester, UL94V-0 Nylon 6T
Insulator Resistance:	1000 Megohms min.
Contact Resistance:	20 mohms max.
Contact Plating:	Gold Flash (std)
Withstanding:	AC 500V
Operating Temp:	-40C ~ +105C

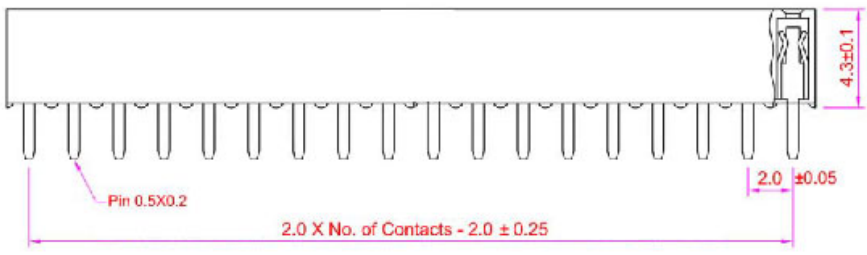

**Recommended
P.C. Board Hole Layout**



RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	10/13/14
				Checked	Lizzy	10/13/14
				Drawn	Tina	10/13/14
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				 UNIT: mm		


Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-02-36-A-GD**
 Description: Receptacle strip, female, 36 position, double row, .079" (2.00mm) pitch, 4.4mm profile, straight type