
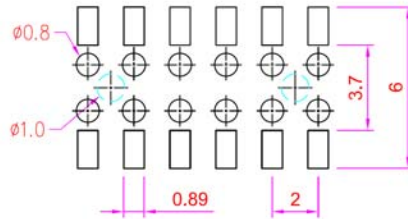


1 2 3 4 5 6 7 8 9

A

A

**Recommended
P.C. Board SMD Layout**

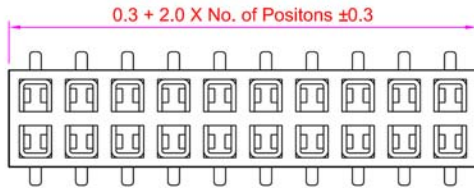

SPECIFICATIONS.

- Current Rating: 2 Amps
- Contact Resistance: 1000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Contact Material: Phosphor Bronze
- Insulator Material: Polyester, UL94V-0 Nylon 6-T
- Contact Plating: Gold Flash, std
- Withstanding: AC 500V
- Operating Temp: -40C ~ +105C

B


B

C

C

D

D

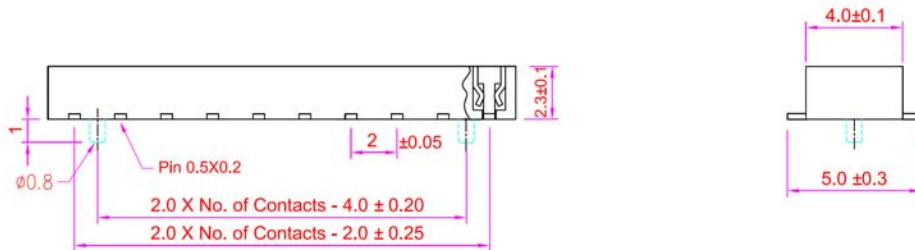

E

E

Series	Rows	Profile	Positions	Tail Spacing	Plating	Option 1	Option 2	Option 3
BRS	XX	BELPA	XX	F	XX	SM	CAP	Package
2mm Receptacle Strip	01=Single 02=Double	BELPA=2.3mm Bottom Entry	Single Row=01-40 Double Row=04-80	F=5.0mm	TN=Tin SGXX=Selective Gold GDXX=Gold (std) XX=flash if blank, 10,15,30u"	SM=Surface Mount	Blank=none PPF=film PPL=Plastic PPM=metal	TB=Tube TR=Reel

RoHS compliant

F

F

G

G

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	01/06/10
				Checked	Lizzy	01/06/10
				Drawn	Tina	01/06/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-02-BELPA-XX-X-XX-SM-XX**

Description: Female Header 2.3mm Bottom Entry, Dual Row SMD

1 2 3 4 5 6 7 8 9