

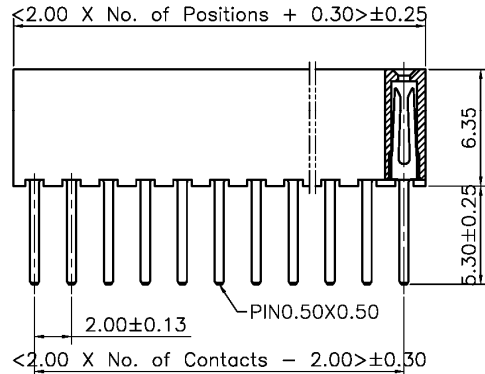


Recommended P.C.B. Layout

Tolerance: 0.05mm



SPECIFICATIONS

- Current Rating: 2 Amp
- Contact Material: Phosphor Bronze
- Contact Resistance: 20mΩ Max.
- Insulation Material: Nylon 6T UL94V-0, Black
- Insulation Resistance: 1000MΩ Min.
- Withstanding: 500VAC
- Operating Temp: -55°C to +105°C

Series	Rows	Profile	Contacts	Tail Length	Plating
BRS	02	XX	XX	X	XX
2mm Receptacle Strip	02=2 Rows Straight	HP=6.35mm HPE=9.35mm	08-160	A=2.4mm (std) B=3.0mm E=5.3mm	TN=Tin SGXX=Selective Gold GDXX=Gold XX=Flash if blank, 10,15,30 u"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	PNT	03/13/12	Greg	Approved	Howard	04/06/08
				Checked	Lizzy	04/06/08
				Drawn	Tina	04/06/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-02-HP-XX-E-XX**

Description: 2mm Vertical Receptacle Strip, Dual Row