



SPECIFICATIONS

Current Rating: 2 Amps
 Contact Material: Phosphor Bronze
 Contact Resistance: 20m ohms max.
 Insulation Material: Polyester, UL94V-0 Nylon-6T
 Insulation Resistance: 1000 Megohms min
 Contact Plating: Gold Flash (standard)
 Withstanding: AC 500V
 Operating Temp: -40°C ~ +105°C

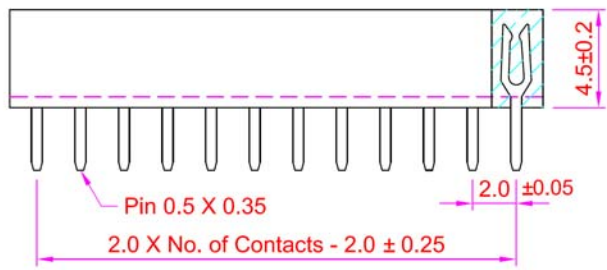

Series	Rows	Profile	Contacts	Tail	Plating
BRS	02	LPJ	XX	C	XX
2mm Receptacle Strip	02=02 rows	LPJ=4.5mm	04-80	C=2.8 Custom Available	TN=Tin SGXX=Selective Gold GDXX=Gold XX=Flash if blank,10,15,30u"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	10/08/09
				Checked	Lizzy	10/08/09
				Drawn	Tina	10/08/09
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-02-LPJ5-XX-C-XX**

Description: Female Header 2.0 x 2.0mm Dual Row, Straight