

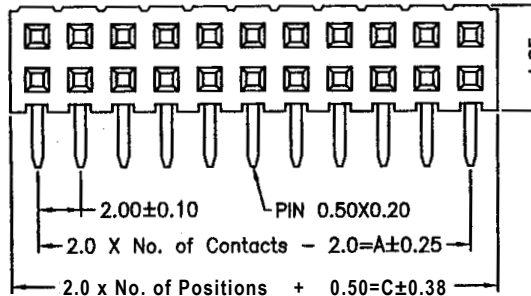
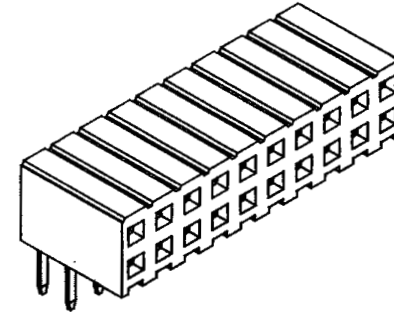


Recommended PC Board
Hole Layout



SPECIFICATIONS

Current rating: 2 amps
 Contact material: Copper alloy
 Contact resistance: 20 milliohms max.
 Body material: Nylon 6T, UL94V-0
 Insulation resistance: 1,000 megohms min.
 Withstanding: 500VAC for 1 min.
 Operating temperature: -40°C to +105°C

| Series | Rows | Profile | Contacts | Tail length (L) | Plating |
|----------------------|----------------------|---|----------------------------------|-----------------|-------------------|
| BRS | XX | RAHDPD | XX | A | XX |
| 2mm receptacle strip | 01=Single 02=Dual | Right angle high profile D. (Many others available) | Single row 2-40 Dual row 4-80 | A=2.55mm | GD=Gold TN=Tin |

RoHS compliant

| Rev. | Description | Date | Approved | Drawing | Name | Date |
|------|-------------|--------|----------|------------|-------------|-------------|
| A | Dim | 5/5/08 | Greg | Approved | Howard | 08/10/99 |
| | | | | Checked | Lizzy | 08/10/99 |
| | | | | Drawn | Tina | 08/10/99 |
| | | | | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3' |
| | | | | | UNIT: mm | |

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-02-RAHDPD-XX-A**

Description: Receptacle strip, 2mm pitch, board mount socket