



**SPECIFICATIONS**  
 Current rating: 2 A  
 Contact material: Phos. bronze  
 Contact resistance: 20 milliohms max.  
 Contact plating: Gold or tin  
 Insulator material: Nylon-6T, UIL 94V-0  
 Insulator resistance: 1000 Megohms min.  
 Withstanding: 500 VAC  
 Operating temp.: -40°C to +105°C

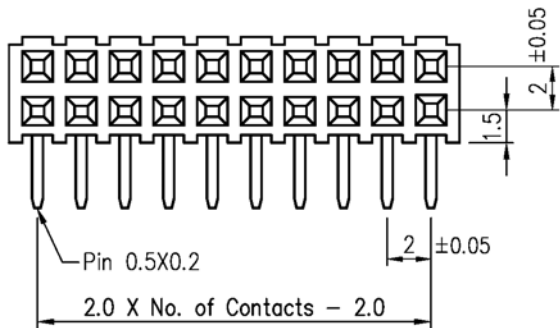

Dimensions			
X	W	A	B
D	7.2	3.0	5.1
F	6.7	2.8	4.6

Series	ROWS	Profile (w)	Positions	Tail length	Plating
BRS	X	RAHPX	XX	C	XX
2mm (.079") receptacle strip	01=1 02=2	Right angle X: D=7.2mm F=6.7mm	02-80	2.8-3.0mm	TN=Tin GDXX=Gold SGXX=Selective gold XX=flash if blank, 5, 15, 30μ"

**RoHS compliant**

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	8/10/99
				Checked	Lizzy	8/10/99
				Drawn	Tina	8/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3°
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-2-RAHPX-XX-C-XX**

Description: 2mm right angle receptacle strip