

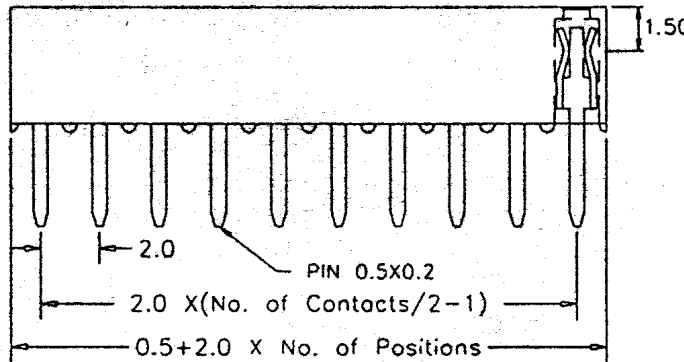


SPECIFICATIONS

Current Rating: 3 amps
 Operating voltage: 250VAC
 Contact material: Phosphor bronze
 Contact plating: Gold over nickel, tin over copper, duplex
 Insulation material: PBT, glass reinforced, UL94V-0
 Insulation resistance: 1,000 megohms min.
 Withstanding: 4,000VAC for 1 min.
 Life cycle: 500 cycles min.

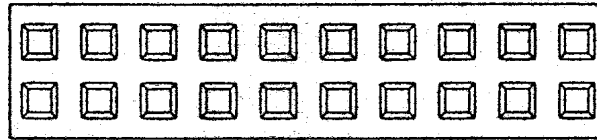

Series	Rows	Contacts	Tail length	Plating	Options
BRS	XX	XX	X	XX	XX
2mm receptacle strip	01=Single 02=Dual	Single row 1-40 Dual row 2-80	A=0.125" (std) B=Custom tail	GD=Gold TN=Tin GD15=15µ" gold GD30=30µ" gold GD50=50µ" gold	[blank]=None SM=Surface mount

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-02-XX-X-XX**

Description: Receptacle strip, double row, .079" (2.00mm) pitch, top entry