

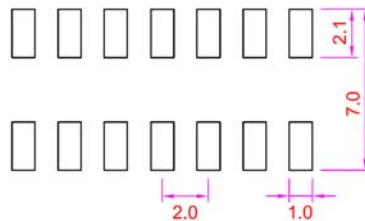


**Recommended  
P.C. Board SMD Layout**



**SPECIFICATIONS**

Current Rating: 2 Amps  
 Insulator Resistance: 1000 Megohms min.  
 Contact Resistance: 20m ohms max.  
 Withstanding: AC 500V  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL94V-0, Nylon 9T  
 Contact Plating: Gold Flash (std)  
 Operating Temp: -40C ~ +105C

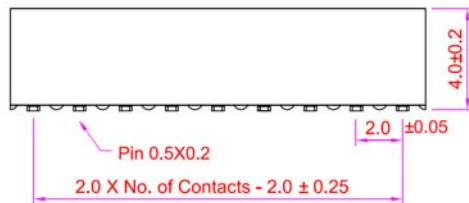

Series	Rows	Profile	Contacts	Plating	Options
BRS	0X	XXX	XX	XX	XX
2mm Receptacle strip	01=Single 02=Dual	[Blank]=4.3mm	Single row 1-40 Dual row 2-80	TN=Tin SGXX=Selective Gold GDXX=Gold XX=flash if blank, 10, 15, 30u"	[blank]=None SM=Surface mount

**RoHS compliant**

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	12/02/09
				Checked	Lizzy	12/02/09
				Drawn	Tina	12/02/09
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-02-XX-XX-XX-SM**

Description: Receptacle strip, double row, .079" (2.00mm) pitch, top entry