

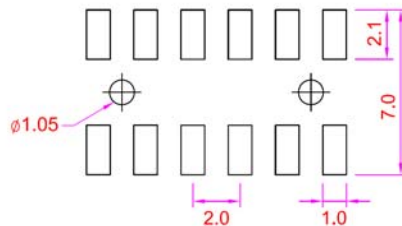


**Recommended
P.C. Board SMD Layout**



SPECIFICATIONS

Current Rating:	2 Amps
Insulator Resistance:	1000 Megohms min.
Contact Resistance:	20m ohms max.
Withstanding:	AC 500V
Contact Material:	Phosphor Bronze
Contact Plating:	Gold Flash (std)
Insulator Material:	Polyester, UL94V-0 Nylon 6T
Operating Temp:	-40C ~ +105C

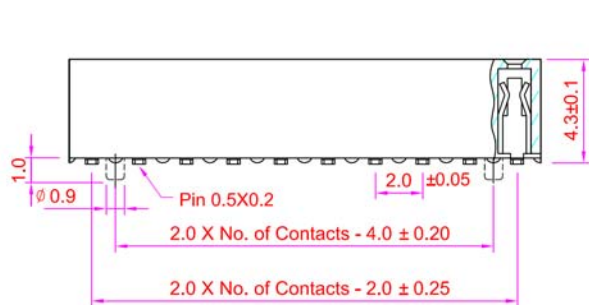

Series	Rows	Profile	Contacts	Plating	Options	Package
BRS	0X	XXX	XX	XX	XX	XX
2mm Receptacle strip	01=Single 02=Dual	[Blank]=4.3mm	Single Row 1-40 Dual Row 2-80	TN=Tin SGXX=Selective Gold GDXX=Gold XX=flash if blank, 15, 30, 50u"	[blank]=None SM=Surface Mount	TRX=Tape & Reel TBX=Tube X:F=Film M=Metal Cap P=Plastic Cap

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/23/07
				Checked	Lizzy	04/23/07
				Drawn	Tina	04/23/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-02-XX-XX-XXXX-SM-XXX**

Description: Receptacle strip, double row, .079" (2.00mm) pitch, top entry, surface mount