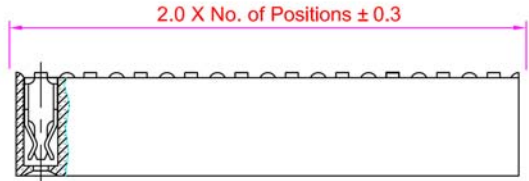
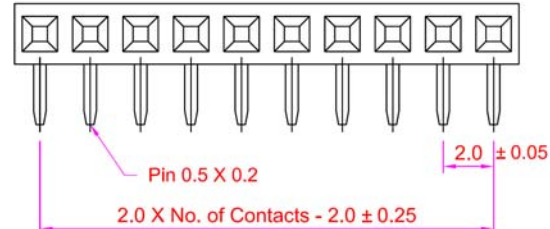




	1	2	3	4	5	6	7	8	9																													
A	 2.0 X No. of Positions ± 0.3 Recommended P.C. Board Hole Layout  2.0 $\phi 0.8$									A																												
B										B																												
C	SPECIFICATIONS Current Rating: 2 Amps Insulator Resistance: 1000 Megohms min. Contact Resistance: 20m ohms max. Withstanding: AC 500V Operating Temp: -40C ~ +105C Contact Material: Phosphor Bronze Insulator Material: Polyester, UL94V-0 Nylon 6T									C																												
D	 Pin 0.5 X 0.2 2.0 X No. of Contacts - 2.0 ± 0.25 2.0 ± 0.05  2.4 ± 0.1 4.3 ± 0.1 2.4 ± 0.2									D																												
E	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Series</th> <th>Rows</th> <th>Profile</th> <th>Contacts</th> <th>Tail</th> <th>Plating</th> </tr> </thead> <tbody> <tr> <td>BRS</td> <td>XX</td> <td>XX</td> <td>XX</td> <td>Length</td> <td>XX</td> </tr> <tr> <td>2mm Receptacle Strip</td> <td>03=Single Row R/A 04=Dual Row R/A</td> <td>Blank=4.3mm HP=6.35mm</td> <td>02-40</td> <td>A=2.4mm C=3.0mm</td> <td>TN=Tin SGXX=Selective Gold GDXX=Gold XX=Flash if blank, 10,15,30 u"</td> </tr> </tbody> </table>									Series	Rows	Profile	Contacts	Tail	Plating	BRS	XX	XX	XX	Length	XX	2mm Receptacle Strip	03=Single Row R/A 04=Dual Row R/A	Blank=4.3mm HP=6.35mm	02-40	A=2.4mm C=3.0mm	TN=Tin SGXX=Selective Gold GDXX=Gold XX=Flash if blank, 10,15,30 u"	E										
Series	Rows	Profile	Contacts	Tail	Plating																																	
BRS	XX	XX	XX	Length	XX																																	
2mm Receptacle Strip	03=Single Row R/A 04=Dual Row R/A	Blank=4.3mm HP=6.35mm	02-40	A=2.4mm C=3.0mm	TN=Tin SGXX=Selective Gold GDXX=Gold XX=Flash if blank, 10,15,30 u"																																	
F	RoHS compliant									F																												
G	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Rev.</th> <th>Description</th> <th>Date</th> <th>Approved</th> <th>Drawing</th> <th>Name</th> <th>Date</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td>Approved</td> <td>Howard</td> <td>08/22/06</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>Checked</td> <td>Lizzy</td> <td>08/22/06</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>Drawn</td> <td>Tina</td> <td>08/22/06</td> </tr> </tbody> </table> 0.0 $\pm$ 0.35 0.00 $\pm$ 0.20 Angles $\pm 3^\circ$ UNIT: mm 									Rev.	Description	Date	Approved	Drawing	Name	Date					Approved	Howard	08/22/06					Checked	Lizzy	08/22/06					Drawn	Tina	08/22/06	G
Rev.	Description	Date	Approved	Drawing	Name	Date																																
				Approved	Howard	08/22/06																																
				Checked	Lizzy	08/22/06																																
				Drawn	Tina	08/22/06																																
 Central Components Manufacturing 440 Lincoln Blvd., Middlesex, New Jersey 08846 Phone 732 469-5720 888 288-5152 Fax 732 469-1919 Part No.: BRS-03-XX-XX-XX-A-XX Description: Female Header, Single Row Right Angle																																						